

(Don't) try this at home!

The effects of recording devices and software on phonetic analysis

Abstract

Because of restrictions on in-person research due to Covid-19, researchers are now relying on remotely recorded data to a much greater extent than has been typical in previous work. Given the change in methodology, it is important to know how remote recording might alter the acoustic signal, either based on different recording devices used by participants and consultants recording themselves or based on video-conferencing software used to make interactive recordings. This study investigates audio signal fidelity across different in-person recording equipment and remote recording software when compared to a solid-state digital recording device that is representative of the standard used in-person for elicitation and fieldwork. We show that the choice of equipment and software can have a large effect on acoustic measurements, including measurements of frequency, duration, and noise. The issues do not just reflect decreased reliability of measurements; some measurements are systematically shifted in particular recording conditions. These results show the importance of carefully considering and documenting equipment choices. In particular, any cross-linguistic or cross-speaker comparison needs to account for possible effects of differences in which devices or software platforms were used.

1 Introduction¹

1.1 Overview: fieldwork in a pandemic

Human subjects compliance boards across various institutions restricted approval of protocols for in-person research for much of 2020, and at the time of writing many of these restrictions are still in place. For this reason, and also for the safety of research participants, many researchers have decided to either postpone phonetic elicitation or turn to alternative methods involving the use of remote recordings. This has led to a rapid and dramatic shift in the types of technologies used for phonetic elicitation both in fieldwork and other linguistic research, as well as language documentation more broadly. In order to use the data collected online, it is necessary to know how the recording device and recording software might impact acoustic measurements.

While in-person linguistic fieldwork has primarily used digital recording equipment for 15 years or more (cf. Bird and Simons 2003; Maddieson 2001; Podesva and Zsiga 2013), the use of video-conferencing or social media software applications for primary fieldwork has not been widespread until this year, a result of restrictions on travel and in-person interactions in response to COVID-19 pandemic. Remote recording technology is readily accessible and there are many different methods which can be used. Prior to the pandemic, the types of technology used for linguistic documentation and archiving had already started to shift away from solid-state recorders in favor of more easily accessible technologies, such as smartphones (cf. Bird et al 2014; Goldman et al 2014). It has long been noted that compression (van Son 2005), technical differences (e.g. transmission over telephone lines; Künzel 2001; Rathcke et al 2017, and cell phones; Gold 2009) all affect measurements of the speech signal (in more or less predictable ways). However, to our knowledge, there is no study which systematically tests the acoustic impact of recent internet-based video conferencing programs in order to establish new best practices for language documentation and sociolinguistic research (cf. Leemann et al 2020). Furthermore, though these considerations have been discussed in technical phonetics venues, it appears that this knowledge is less commonly discussed among endangered language researchers. Therefore, our aim is both to make these issues more transparent and to suggest some best practices for researchers suddenly faced with the shift to online recording.

¹ Acknowledgement footnote removed

Without testing of this type, we do not know how the data that we archive today encodes artefacts from these different technologies, and how comparable contemporary datasets are to materials digitized from analog collections. In particular, the rapid shift to online fieldwork raises questions, including whether this remotely recorded data is comparable to data collected in-person, as well as what differences are likely to be present. While some acoustic signals may be less affected by differences in recording method (e.g. duration of consonants or vowels), other types of measurements are likely to be more sensitive to differences between methods and devices. For example, because the center of gravity (COG) in fricatives measures aperiodic noise, background noise can influence these measurements, particularly in spectrally diffuse fricatives like [f]. A high degree of background noise could thus substantially alter the COG of [f], while fricatives with denser spectral peaks exhibit less of an influence from background noise. Measurement issues that disproportionately impact certain sounds thus might not only alter the raw measurements but also the evidence for contrasts.

In this paper, we report the results of a two-phase experimental data gathering study which tests the impact of recording equipment and software applications on the recording output of linguistic data. In the first phase, we gathered a single acoustic sample on six commonly available technological devices. In the second phase, we recorded speech played over popular video conferencing applications in order to test the effects of that software on the audio.² These methods were devised to highlight possible interactions between signal intake through a device, signal transmission, and signal processing through different software. We compared these recordings against a digitally recorded “gold standard” solid state recording. We found that some remote recording methods produce acoustic signals that statistically resemble the solid-state audio, whereas other remote recording methods produce audio that significantly differs from the solid-state audio recordings. While identification of contrasts remains clear in the majority of cases, the raw measurements are substantially altered for many characteristics, including duration, intensity, and spectral measurements. This raises issues for work on comparative

² There are several factors which fall beyond the scope of this study such as the effects of technology on inter-speaker, genre (see Hall-Lew and Boyd 2017), and formality differences (see Sneller 2021). As a result, we do not make any claims about these results in comparison to other studies.

phonetic typologies or sociolinguistic research which relies on the comparisons of acoustic data from different sources.

We begin with an overview of digital speech recording (Section 1.2). The design for our tests is described in Section 2. We briefly summarize the results of tests in Section 3. Finally, in Section 4 we discuss the implications of our results for remote fieldwork, both during the pandemic and in the future. The supplementary materials provide fuller discussion and analysis of the statistical results.

1.2 Digital speech recording

When speech is recorded digitally, the air vibrations that comprise the speech signal are encoded as a set of binary data that can be read by the computer, reconverted to audio and played through speakers, and otherwise manipulated.³ The raw acoustic signal can be frequently sampled, producing accurate reproductions. However, doing so creates large files. There is a tradeoff between high fidelity and bandwidth choking when sending large amounts of audio and video traffic over the internet. Moreover, parts of the spectrum can be compressed without loss of comprehensibility to the average user.

Turning to the effects on online recording on speech, there are several types of acoustic signal manipulation which are likely to introduce variation: (1) different types of *compression*; (2) different types of *filters* introduced by software programs; and (3) different *sampling rates*. We describe each of these below.

Audio **compression** can be *lossless* (that is, encoded in such a way that recorded information is fully recoverable) or *lossy*, where parts of the signal are irretrievably compressed. Both types of codecs are in common use (cf. Drude et al 2011; Bower 2015:18–36). Compression may be *vertical* (compressing parts of the sound spectrum but not affecting timing), or *horizontal*, where, for example, silence is compressed. Compression also occurs within the speech signal; of course, any alterations in timing can cause issues in any frequency measurements, because frequency is

³ For more information about this process, see Zölzer (2008), Lyons (2011), and Lyons & Fugal (2014).

defined by timing. Compression can cause large jumps in frequency measurements like f_0 , formants, and center of gravity, as well as smaller shifts in these measurements (van Son 2005; de Decker & Nycz 2015; Nash 2001).

Compression is often not uniform across the entire signal, but identifies repeating wave patterns; a repeating cycle is mostly redundant information that can be reconstructed from more reduced information. Compression systems often include some assumptions about the signal, such as using this type of frequency-based compression (Sun, Mkwawa, Jammeh, & Ifeachor 2013); while this can improve perceptual clarity, it does not necessarily preserve all of the acoustic cues that will be relevant for phonetic analysis. Variable bit demand between frames can exaggerate or eliminate spectral valleys, altering formants, f_0 , and spectral tilt (Liu, Hsu, & Lee 2008). Although codecs usually have anti-aliasing filters to prevent conversion of frequencies that are higher than the sampling rate can measure, this does not prevent the system from misidentifying the frequency and altering the signal based on the assumed frequency.

Some internet-based recordings **filter** out background noise and feedback (e.g. echos from the microphone picking up signal from the device's speakers⁴), which also decreases the amount of information that needs to be sent and may improve the listening experience for individuals. However, manipulations to reduce noise may also alter acoustic measurements depending on how the algorithm identifies noise and what frequencies are attenuated or amplified. This kind of audio manipulation may also come from the device itself. For example, some sound cards now include audio manipulation (e.g. boosting or depressing certain frequencies).

Finally, digital audio can be **sampled** at different rates. The sampling rate may be constrained by a variety of factors, such as the type of microphone that is used or the recording device itself. Historically, different linguistic subfields have established different standards of recorded signal fidelity. Within sociolinguistics, major documentation projects such as the Atlas of North American English (Labov, Ash, & Boberg 2006) have made use of telephone-quality recordings

⁴ For example, <https://support.zoom.us/hc/en-us/articles/360046244692-Background-noise-suppression> describes some of Zoom's background noise suppression techniques.

which have a sampling rate around 8kHz/s.⁵ It has long been considered best practice in language documentation to use a sampling rate around 44.1 kHz/s, in order to create high-quality recordings, even if lower quality would be adequate for the goals of the project. This is because researchers cannot anticipate how future language records might be used; subsequent research questions might require recordings with a high sampling rate. Projects which do not require the higher sampling rate can always employ a technique called *downsampling*.

Downsampling is the audio equivalent of reducing resolution in an image file, and refers to how frequently the audio spectrum is sampled. In addition to reducing the precision in temporal measurements, lower sampling rates limit what frequencies can be measured, thus leading to loss of information at higher frequencies (Johnson 2008). Most speech information, such as vowel formant structure, is at lower frequencies (below 4000 Hz), and will not be obscured by lower sampling rates. Other information, such as fricative frequency structure, is encoded in higher frequencies and can be sensitive to sampling rate (Johnson 2008:22–23). In particular, fricatives often make use of a measurement called the center of gravity (COG) (Gordon, Barthmaier, and Sands 2002). To get a sense of how sampling rate can affect fricatives, we will revisit the point made above about sampling rate standards used in different fields of linguistics. The standard sampling rate over telephone lines, as sometimes used in sociolinguistic studies, is around 8kHz/s, whereas the standard audio recording sample rate from a solid-state recorder is usually 44.1kHz/s (cf. recommendations in field linguistics textbooks such as Bowerman 2015). Fricatives like [s] have spectral energy which exceeds 8kHz, meaning that some of the energy of the [s] is cut off over the phone, but these frequencies are retained in a standard audio recording. Sociolinguistic studies that use telephone recordings generally do not focus on fricative contrasts, but rather on vowel contrasts (Labov, Ash, & Boberg 2006:4), which are not as affected by the lower sampling rate. Even if a sound remains perceptually clear at lower sampling rates, cutting off higher frequencies will result in lower COG measurements.

Variation in the quality of the online recording can arise either from the software program used or from the device used. The variation may arise via (1) different types of *compression*,

⁵ See Leemann et al. (2020) for a discussion of cellphone data collection and best practices for online interviewing in a sociolinguistic context.

particularly variable rate compression that may preserve data optimized for human speech but at the expense of manipulating the signal irrecoverably; (2) artefacts in the signal introduced through equipment *noise*, poor shielding, or through the background *filters* introduced by software programs; or (3) different *sampling rates*. This, of course, is in addition to all the issues about audio recording that fieldworkers are familiar with based on the circumstances of recording, such as background noise, microphone placement, and the recording environment (see, for example, Barwick 2006; Bower 2015; Seyfeddinipur and Rau 2020).

2 Methods

In this section we describe methods used to record and compare speech across multiple recording devices and software programs. Given the proliferation of recording devices and software for audio recording and sharing through social media, there are potentially limitless combinations of apps, software, and devices to test. Our aim was not to produce a comprehensive set of comparisons; that would not be feasible. Instead, we chose software applications and recording equipment that are already commonly used, and we focused tests on those choices most likely to impact the audio signal. For example, we made sure to test solid state recording equipment (the “gold standard” of in-field recording) vs. cellular telephones, but we did not test different types of solid state recorders. On the software side, we tested local recordings versus remote recording, but did not *additionally* test files which were locally recorded through a device and then uploaded remotely.

Language users cannot repeat language utterances identically from production event to production event, and background noise may differ across production events. Therefore, we could not simply record the same speakers sequentially on different devices, because each recording could introduce new variation. Instead, we constructed a two-phase setup so that all comparisons occur between multiple recordings of the same production event. In Phase 1, each speaker produced a set of stimuli while all devices recorded simultaneously. In Phase 2, the recording from the solid-state recorder was used as the input to each software. Figure 1 summarizes the different recording conditions and the setup is described in more detail in Sections 2.2 and 2.3 below.

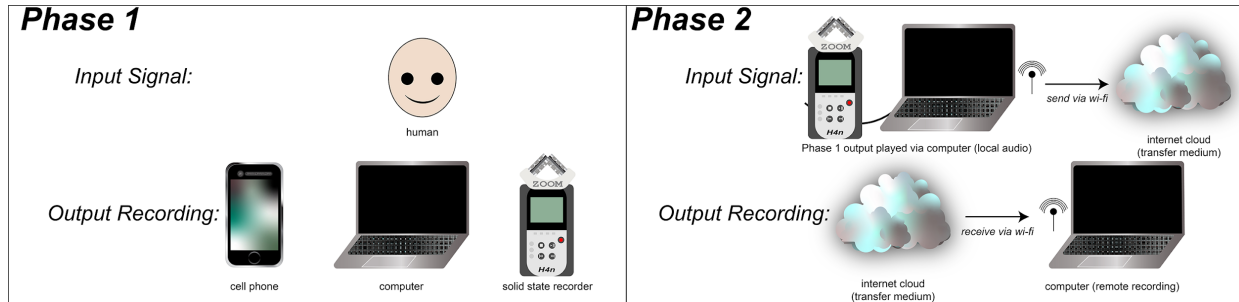


Figure 1: Setup of recording phases

In the remainder of this section, we discuss the stimuli we used (Section 2.1), the device setup in Phase 1 and the software selection in Phase 2 (Sections 2.2 and 2.3), the types of acoustic measurements we made (Section 2.4), and the statistical analyses we used (Section 2.5).

2.1 Stimuli

Stimuli were designed to test some parameters of acoustic interest (cf. Whalen et al 2020), in particular using contexts where those parameters are part of the realization of distinctions made in English (e.g. f_0 as related to stress and onset voicing). The stimuli allowed us to construct a vowel space for speakers, and also test f_0 , jitter, peak timing, duration, intensity, spectral tilt, Harmonics-to-Noise Ratio (HNR), and the center of gravity (COG) of fricatives. The stimuli are given in the Supplementary materials. Stimuli were 94 target words embedded in the carrier sentence “we say [word] again” and delivered through PsychoPy (Pierce 2007) on the computer that was running the internal microphone condition in Phase 1 (described in Section 2.2). The recordings were made by three native speakers of English.⁶ One speaker (NW) was excluded

⁶ The three speakers are female, with ages between early 30s and early 40s. All three speak different English dialects (two North American, one Australian).

from the statistical tests of the by-device comparisons (Phase 1) due to a recording error with one device.

2.2 Device setup (Phase 1)

As briefly discussed above, we used a sample of convenience for recording equipment, and did not attempt to include all possible configurations of internal and external microphones and types of devices. We tested an array of commonly used devices, such as Macs, PCs, tablets, cellular phones, and handheld recorders. All devices were in airplane mode and running on battery power. Table S1 in the supplementary materials gives the specifications of the items that were tested. The recording took place in a quiet room in an otherwise empty building, but with some street noise. Three speakers of English with different regional dialects recorded the stimuli analyzed in this phase.⁷ The picture in Figure 2 illustrates the setup:



Figure 2: Phase 1 recording setup. (1) Zoom H4n; (2) ipad; (3) computer with internal microphone; (4) computer with external headset microphone; (5) android phone; (6) iphone. See supplementary materials for specifications

⁷ Due to COVID-19 campus restrictions on who is permitted within university buildings, external participants were not recruited. Social distancing measures were implemented during all recordings.

2.3 Software selection (Phase 2)

The second phase was carried out remotely to test recordings made over the internet. This involved two researchers, mimicking the combination of the “local” and “remote” recordings of a fieldwork consultant. In each case, the recordings made with the Handy Zoom H4n (“H4n”⁸) solid state recorder in the first phase were played through the sound card of a 2012 Macbook Air (where the H4n was recognized by the computer as an external microphone). The H4n was connected to the computer using a TRRS connector cable attached to the headphone/line-out jack of the H4n and the microphone/headphone combined jack in the Macbook Air. While this is not equivalent to recording live speech, it does ensure that identical signals were transmitted across each remote recording condition. The input from the H4n was recorded uncompressed at 44,100 Hz through the H4n’s internal microphones. The output was governed by the settings of the software programs being used.

The software programs which were tested were: Zoom, Skype, Facebook Messenger (using the free program Audacity to make the recording, since Messenger does not have built-in recording capabilities), and Cleanfeed, a commonly used podcast interview platform.

2.4 Acoustic measurements

The software and devices used to make these recordings produce audio files in several different formats. All audio files were converted to 16,000 Hz uncompressed mono wav files, because this is the format required for forced alignment through p2fa. The audio files were then trimmed so that only the speech of the experiment was kept. These recordings were force-aligned to the segmental level using the p2fa forced alignment scripts described by Evanini et al (2009), which aligns at a resolution of 10ms.⁹ These recordings were inspected for major alignment errors (of which there were none) but were not further corrected. We only used the data from the target words (not the carrier phrases) in these analyses.

⁸ While these devices are typically referred to as “Zoom” recorders, we call this the H4n recorder to distinguish it from the video conferencing software Zoom, which has no relationship to the solid state recorder.

⁹ Because all files used the same speech input, it would be, in theory, possible to manually correct a single set of “gold standard” alignments from the H4n recording and use the correctly aligned version in all experiment conditions. However, in practice this is impossible, because the different lossy compression algorithms introduced by different recorders leads in practice to non-identical file lengths. This is further discussed in Section 3.

The acoustic characteristics measured were: Duration, F1, F2, F3, Center of Gravity (COG), jitter, f0 mean, f0 peak timing, spectral tilt (H1-H2), Harmonics-to-Noise ratio (HNR), and intensity. Measurements were extracted using scripts in Praat (Boersma & Weenink 2017). All measurements are means taken across the whole interval, except characteristics that are a single point by definition (e.g. time of the f0 peak). Phonation measurements were calculated using Voice Report with the following parameters: start, end, 65, 350, 1.3, 1.6, 0.03, 0.45. For COG, fricatives were extracted with Hanning windows to create the spectral objects for analysis. Formants were analyzed with a maximum frequency setting of 5500 Hz for 5 formants.

Signal to noise ratio was calculated across the intervals marked as “silence” in the forced alignment versus those marked for the target words that were analyzed for the acoustic characteristics described above. The signal to noise ratio calculations compared the intervals labeled as silence by the alignment algorithm versus those in the carrier phrases. These were then averaged across each recording condition.

2.5 Statistical analyses

All statistical results are from mixed effects models calculated with the lme4 package in R (Bates et al 2015). The p-values were calculated by the lmerTest package (Kuznetsova et al 2015). The reference condition, which the other conditions were compared against, was always the H4n recorder.

3 Results

Here we summarize the main results. For reasons of space and legibility, only an overview is presented, and more thorough discussion of each condition is provided in the supplementary materials. Section 3.1 provides a general overview of the key findings about variation between devices and software programs and presumes minimal familiarity with phonetic measures. Section 3.2 discusses the results of individual acoustic measurements, while Section 3.3. presents an overview of findings with respect to recovery of data for contrasts.

When reading the results, the size of the effects and the significance must be interpreted with respect to the somewhat small amount of data. Lack of significance cannot be interpreted as indicating that there is no real effect, and some of the estimates are large despite not being significant, suggesting a high degree of variability. This overview should be read in conjunction with the supplementary materials, which provides further discussion of all of these points ([Supplementary Materials](#)). We concentrate here on a description of the results that will be accessible to linguists who do not use quantitative methods extensively in their work but whose work is affected by recording choices.

3.1 Summary of results

While our set of measurements is not exhaustive, we cover several types of measurements that exhibit effects of recording condition. These can broadly be grouped into measurements of duration, measurements of intensity in aperiodic noise, and measurements of frequency.

First, as seen in more detail in Section 3.2, duration measurements seem to be affected by the compression algorithms used in m4a formats. The effects on duration are likely influenced both directly by lossy compression effects on timing and also indirectly when boundary assignment is obscured by noise and lowered intensity of the signal. While manual segmentation would likely reduce the latter effects, they would not be fully eliminated, and the compression-based effects could not be improved at all.

Second, there are also differences in levels of background noise, efficacy in capturing the speech signal, and filtering meant to remove background noise or boost the speech signal. Lowered signal-to-noise ratios, either due to higher intensity of noise or lowered intensity of the signal, directly impacts measurements like the Harmonics-to-Noise ratio (HNR) and center of gravity (COG). Changes in noise and intensity also have indirect effects in identification of segment boundaries and measurement of other characteristics that depend on being able to isolate the target characteristic of the speech signal.

Lastly, there are changes in measurements of frequency, observed in f0 and formants. These are likely the result of lossy compression; depending on how the compression system handles repeating waves, these could be over-regularized or obscured. Compression that alters the file's duration will also produce changes in spectral measurements. Some of the spectral issues may also be caused by changes in intensity, as some recording conditions are less sensitive to certain frequency ranges, which can subsequently change how formants and f0 are identified. Of course, changes in intensity of different frequencies is also directly reflected in spectral tilt effects. Such differences are also likely to affect perceptual clarity, making fieldwork using remote recordings more difficult and making transcription less reliable.

There were a larger number of significant differences between software programs than between devices. Intensity and signal to noise ratio measures differed significantly among devices, but most other measures are not significantly different. As noted above, however, though the differences were not all statistically significant, we did find measurement differences, that is, raw differences in the measurements of variables beyond what one might expect. The software choices also led to differences in intensity, signal to noise ratio, and duration measurements.

Finally, we found that we were, in almost all cases, able to recover evidence for the phonemic distinctions which were tracked (such as stressed versus unstressed vowels, voicing differences, and vowel space measurements to capture vowel differences). However, the raw measurements of the distinctions varied, in some cases substantially.

3.2 Individual Acoustic Metrics

Table 2 below summarizes the different measures in the Phase 1 recordings, testing differences based on recording device. Asterisks indicate significance levels at < 0.05 (*), < 0.01 (**), or < 0.001 (***). When a test was significant, then the direction of significance is also indicated in that table cell.

Table 2: Effects of device on acoustic measures. Empty cells indicate that the condition did not differ significantly from the Zoom H4n solid state recording in the given characteristic.

Device:	Android (m4a)	External Mic (wav)	Internal Mic (wav)	iPad (m4a, compressed)	iPhone (m4a, uncompressed)
Consonant Duration			** (shorter)	* (shorter)	
Vowel Duration				* (longer)	
Consonant Intensity	*** (lower)	*** (lower)	*** (lower)	*** (lower)	*** (lower)
Vowel Intensity	*** (lower)	*** (lower)	*** (lower)	*** (lower)	*** (lower)
Mean Vowel f0					
Peak f0 timing					
Jitter	* (lower)				
Spectral tilt			** (lower)		
Harmonics-to-noise ratio			*** (lower)		
F1					
F2			* (lower)		
Center of Gravity (frics)		** (higher)	** (higher)		
Signal to noise ratio	*** (higher)	*** (higher)	*** (lower)	*** (lower)	*** (lower)

In addition to those tests reported here, we also tested whether devices differed in capturing the acoustic cues to English phonological contrasts. The measurements included: stress reflected in vowel duration, intensity, and F0 maximum; coda voicing reflected in vowel duration and HNR; onset voicing indicated in HNR, spectral tilt, and F0 maximum; obstruent manner indicated in intensity; and sibilant identity indicated in COG.

Few measurements of these contrasts are significantly altered by device, though both the internal computer mic and external computer mic conditions overestimated the difference between the COG of /s/ and /ʃ/. However, most contrasts were maintained in the recordings, as further discussed below.

Consonant duration was significantly shorter than the baseline standard in the InternalComputerMic condition and the iPad condition. The existence of differences in duration might suggest that other factors are impacting how the forced aligner determines boundaries; most of the overall estimates as well as the estimates for individual segments are within about 10 ms, which is close to the margin of error of the forced aligner (Evanini et al 2009; see supplementary materials). It is also possible that some effects on duration reflect actual differences in duration measurements within the file, through lossy compression warping the signal in different ways. This is, however, unlikely. The Android and iPad were recorded with compressed audio, while the iPhone condition was not. However, the iPad results are almost identical to the Internal Computer Microphone, which (like the external computer mic) used Audacity to record the audio. Therefore it is unlikely that compression algorithms alone are responsible for the differences. The differences in consonant duration seen in the table above appear to be largely offset by the differences in vowel duration. That is, those conditions where the vowels are shorter are the same ones where the consonants are longer. This implies that the issue is a difference in boundary placement identification rather than compression. Note, moreover, that the magnitude of the effects is overall quite small (as detailed in the supplementary materials).

Our gold standard recording did not have a particularly high signal to noise ratio, compared to some of the other recording devices used in the live recording condition. This is probably due in part to the sensitivity of the H4n's microphone and picking up background noise from the air conditioning system and external traffic noise. The SNR can also be influenced by the distance of each recording device from the speaker. SNR values varied by speaker in the gold standard recording. They also varied by both device and software program, implying that software adjusts internal volume levels.

Table 3 below summarizes the different measures in the Phase 2 recordings, testing differences based on the software application used. The models comparing these conditions used only one of the conditions that we recorded with Zoom software, because there were no significant differences between using different settings in Zoom (compressed or ‘original’ sound, or audio channel extracted from the video vs separate audio channel). The Zoom condition reported was recorded locally with the default audio settings.

Table 3: Effects of device on acoustic measures. Empty cells indicate that the condition did not differ significantly from the H4n solid state recording in the given characteristic.

Application	Audacity (wav)	Cleanfeed (wav)	Messenger (wav)	Skype (.mp4)	Zoom (.wav)
Consonant Duration			***(shorter)	***(shorter)	***(shorter)
Vowel Duration			***(longer)	***(longer)	***(longer)
Consonant Intensity		***(lower)	***(lower)	***(lower)	***(lower)
Vowel Intensity		***(lower)	***(lower)	***(lower)	***(lower)
Mean Vowel f0					
Peak f0 timing					**(later)
Jitter					
Spectral tilt	**(underestimate)	**(underestimate)	***(overestimate)	**(underestimate)	***(underestimate)
Harmonics-to-noise ratio			***(higher)		
F1			*(lower)		
F2			*(higher)		

Center of Gravity (frics)			** (lower)		* (higher)
Signal to noise ratio		*** (higher)	*** (higher)	*** (higher)	*** (higher)

Duration and intensity measures were often affected, even in cases where the recording signal is supposedly uncompressed, as in the Zoom condition where audio compression options were unchecked. This could be the result of the background noise and highpass filters leading p2fa to identify CV transitions in different places. Most of the programs do not record a significant difference between software conditions when it comes to f0 and formants. However, this lack of significant difference is not because these measurements were unaffected. Across different vowels, frequency was sometimes overestimated and sometimes underestimated; the lack of significant overall differences is due to the effects not being systematic across different vowels. Section 3.3 provides a discussion of how formant measurements for different vowels were impacted differently by the software conditions.

Contrasts were generally still captured, even for characteristics that were influenced by the recording condition. Just as in Phase 1, there was some variation across conditions that did not reach significance. Additionally, Messenger failed to capture the effect of stress on vowel intensity and the difference in COG between /s/ and /ʃ/.

The gold standard H4n recorder did not have the highest signal to noise ratio; it was actually lower than any of the software program conditions. The highest signal to noise ratio comes from the Zoom condition, presumably as an effect of the Zoom software suppressing background noise. While filtering background noise or amplifying frequencies that are typical of speech increases the signal to noise ratio, this filtering alters the acoustic signal and could potentially influence the results in misleading ways. Having a higher SNR is not necessarily indicative of a higher fidelity recording, even if the suppression of certain frequencies increases perceptual clarity for listeners.

3.3 Combined Acoustic Metrics

While the previous section discussed absolute measurements of a range of acoustic phenomena, in this section we examine another facet of the data: how clearly phonetic cues to phonological contrasts are separated in each condition. That is, are features of the speech signal that mark phonological contrasts sufficiently recoverable to allow linguists to do phonological documentation? A few contrasts are presented here as examples; the full results testing the measurement of contrasts are given in the Supplementary Materials.¹⁰

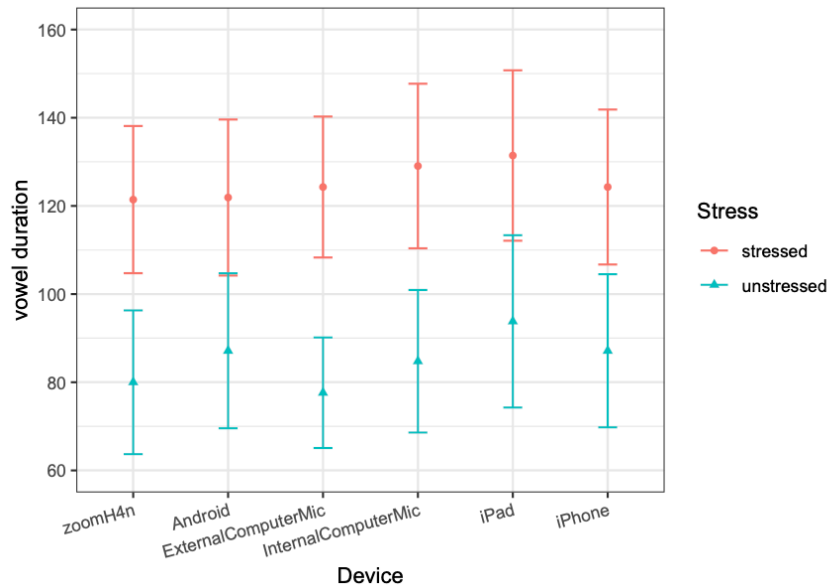


Figure 3: Aggregated stressed vs unstressed vowel duration across Phase 1 devices. Measured vowel duration as predicted by device and stress. Pooled raw data, not the model results. Whiskers indicate the standard error and the dot is the average.

Figure 3 illustrates vowel duration differences between stressed and unstressed vowels across Phase 1 devices, while Figure 4 illustrates vowel duration differences between stressed and unstressed vowels across Phase 2 recording software. In all cases, the contrast is recovered,

¹⁰ Note that this set of contrasts is limited to English contrasts, based on the language of the experiment. We did aim to include examples of contrasts that depend on different types of acoustic characteristics, including duration, frequency of periodic waves, and intensity of periodic and aperiodic components of the signal. However, it is possible that contrasts other than the particular ones we measured here might behave differently.

though note that the category separation differs among conditions in both Phase 1 and Phase 2. As discussed in Section 3.2, vowel duration measurements are lengthened (though not always significantly) and that can be seen from these results as well. The device results have a higher variance than the software conditions.

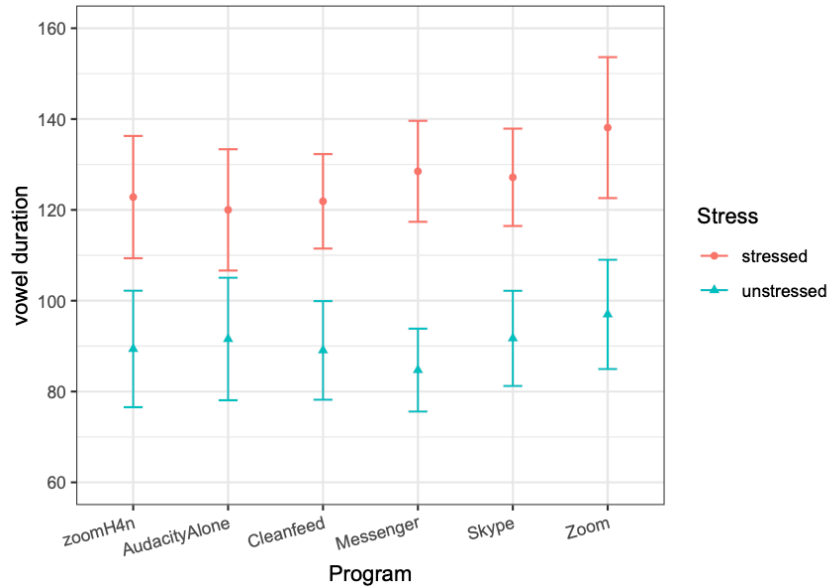


Figure 4: Aggregated stressed vs unstressed vowel duration across Phase 2 applications. The dots represent the average duration and the whiskers the standard error.

Figure 5 gives the vowel spaces for each speaker as measured in Phase 1 (by-Device). Since the speakers come from different regions of the English-speaking world, we separate the vowel spaces by speaker.

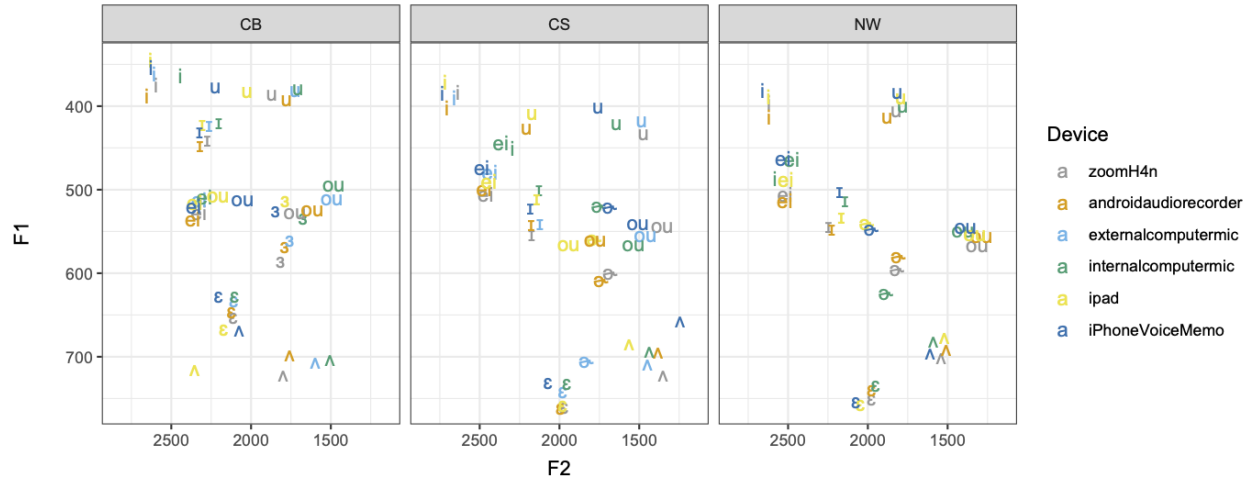


Figure 5: Vowel spaces for each of the three speakers as measured in Phase 1 (comparisons by Device).

The device conditions in Phase 1 all clearly pick out a recognizable vowel space. However, some of the vowels are shifted enough that they would likely cause problems for analysis. In particular, F2 measurements for /u/ and /ou/ were very high in many of the conditions. While other vowels did not exhibit systematic effects, there are several vowels that have strikingly variable measurements across conditions. Including the interaction between device and vowel significantly improved the model for F2, indicating that the differences in F2 between vowels were measured differently by different devices. There was less evidence for an interaction with F1.

Vowel spaces from Phase 2 exhibit considerable variation across different software applications. Figure 6 gives vowel spaces for each speaker as measured in Phase 2 (by-Program). Including the interaction between device and vowel significantly improved the model for both F1 and F2, indicating that the differences in formants between vowels were measured differently by different devices.

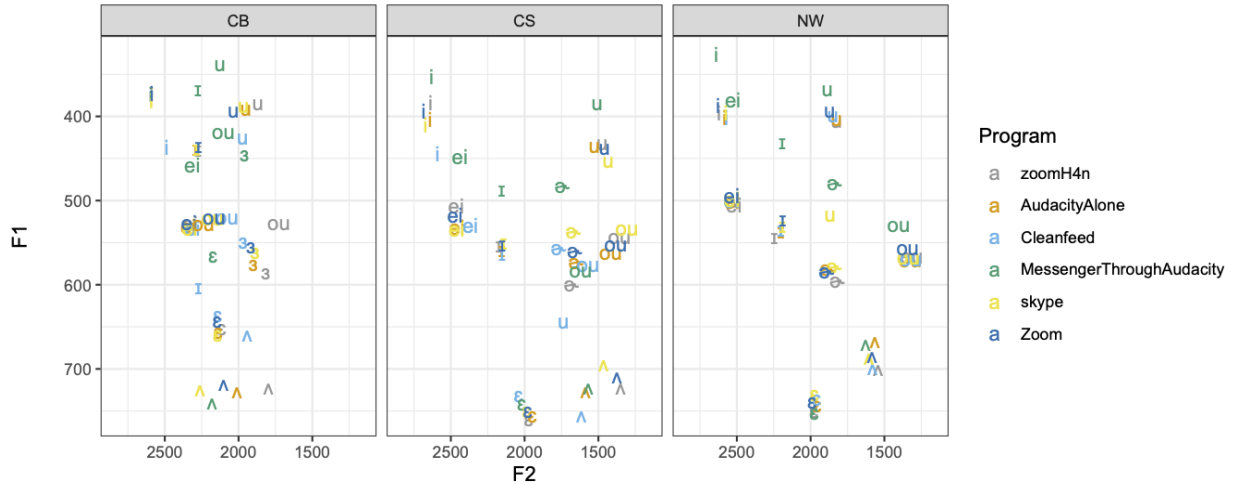


Figure 6: Vowel spaces for each of the three speakers as measured in Phase 2 (comparisons by Program).

Many of the conditions produce measurements that substantially shift a vowel far into the region of a different vowel. While clusters for measurements of each vowel are mostly apparent, Messenger is a clear outlier for most of the vowels for most of the speakers.

It is important to note that the lack of overall effect in a measurement across vowels or other categories does not indicate that each individual data point is reliable; formant measurements have no main effect for most devices or programs because different vowels are impacted in different ways. These inconsistent effects across vowels are in fact likely to cause more issues than consistent effects, because they could obscure or exaggerate phonological contrasts, while a consistent shift would be more likely to preserve contrasts.

4 Discussion, Implications, and Recommendations

4.1 Implications of the results

As seen from the previous section, both device and software altered the recording in ways that affected the retrieval of measurements and the instantiation of contrasts (though not, by and large, the contrasts themselves). Some of the effects of different devices and recording programs were very large and could produce misleading phonetic results. Contrasts generally remained

clear, because effects were largely consistent across different items, but some contrasts were exaggerated or underestimated. The main – and important – implication of the results is that it will be difficult to directly combine or compare data gathered “in person” in the field with data gathered remotely, even if recorded from the same speaker. Even the relatively reliable conditions produced measurement differences that will need to be taken into account in any analyses.

The variation across recording conditions problematizes research that, for example, asks participants to record themselves and upload recordings, if that recording is done on different devices. It also means that the findings of cross-linguistic phonetic comparisons, such as Salesky et al (2020), should be evaluated in the context of possibly substantial interference from differences in measurements resulting from the circumstances of recording. This is particularly an issue for work on endangered languages, where a small number of speakers may be taken as “representative” of the language, further confounding differences between speakers, languages, and devices.

Secondly, fieldworkers should be wary about combining recordings from the same speaker that were made in person and remotely at different times. That is, recordings made from the same person but with different devices are likely to show differences that are not features of the person’s speech.

Thirdly, this work raises questions for any work that requires stable identification of features across devices or programs. While our discussion focuses on implications for fieldwork and language documentation, these effects are similarly relevant for sociophonetics research, online phonetic production experiments, and (perhaps most importantly) forensic phonetics, where the variation identified here (based on device and software) should be taken into consideration in voice comparisons.

In the following sections we make some recommendations for field linguists looking to minimize the impact of device or software bias on their recordings.

4.2 Documenting recording set-up

Documenting the recording set-up is crucial: what microphone was used, what program was used, and any settings for programs that allow multiple settings. Even if effects of these conditions do not have a large impact on comparisons *within* a recording, documenting the recording conditions will facilitate interpretation of results and comparisons across recordings, both for fieldworkers themselves and for others using their data in the future. The recordings being made now are the archival data for the future, so it is important to provide as much information as possible to make these recordings interpretable. The more we know about the effects of particular recording conditions, the better our ability to make comparisons across different recordings.

One should always be cautious about comparing measurements from one set of recordings to measurements from another set of recordings, particularly if there is no documentation of what recording set-up was used to create a set of recordings. Our results suggest that the recording set-up should generally not have a substantial impact on being able to identify contrasts; most of these methods will recover most phonological contrasts, so comparisons within a recording are likely to be usable. However, the magnitude of the effects may be estimated differently, and the precise measurements will vary across devices and software programs. The raw measurements are unreliable for a range of factors across many conditions.

For language documentation, online recording can be used to recover phonemic contrasts and for broad description of linguistic processes, though the data might not reliably demonstrate the specific acoustic phonetic realization of each category. Researchers making comparisons across individual speakers (for example, in sociolinguistics or in comparative phonetics) or comparisons across languages need to be particularly aware of these issues. It is important to consider potential effects of the recording set-up, particularly if it varies across speakers. If information about the recording set-up is not available, it will be very difficult to distinguish between effects of the set-up and effects of the speaker or the speaker's language.

4.3 General recommendations

Based on the conditions we tested, we have a few specific recommendations for fieldworkers, sociolinguists, and anyone else conducting phonetic research.

Because of the substantial differences across different recording conditions, it is important to make comparisons within the same recording whenever possible, and to use the same set-up when making multiple recordings that will be compared with one another, e.g. when recording multiple speakers in documentary and sociolinguistic tasks. When making long-distance recordings, ensure that the setup is the same on both ends (their set-up and yours) for all speakers being recorded.

If using different devices or programs is unavoidable, this will, most likely, limit possibilities for making comparisons across different individuals, because individual differences will be confounded with differences due to the recording conditions. It will nonetheless be particularly important to include participant/recording as a factor in analyses. Given that linguistic fieldwork, particularly for endangered languages, is often conducted with few individuals, “pandemic recordings” from different speakers using different platforms may mean that in the future we will be unable to distinguish between individual *speaker* differences and individual *software* differences in much of this data. This risk is especially problematic for endangered languages, which are already severely phonetically underdocumented (Whalen et al 2020).

Researchers doing virtual recordings should consider testing their own setup for which effects are likely to be present, by comparing a field recorder to the setup the linguistic consultants are using. The stimuli used here are available for download as part of the supplementary materials if readers would like to directly compare their setup with the results here.

4.4 Recommendations about devices and local settings

For recording devices, an external computer microphone is preferable to the internal microphone, even for a relatively new computer with a high quality microphone. Avoid compression if possible, and use lossless formats; this difference is reflected by the difference between our iPad

and iPhone conditions. This will mean that recording file size may become an issue and external storage may be necessary.

Our device recording tests suggest relatively little overall difference between devices, apart from intensity measures, which could simply be due to the different distances each device had from the speaker. This is good news for making recordings in the field, and suggests that if possible, the best way to record remotely is to have research participants make recordings on their own devices (including phones or tablets) and transfer those recording files via file upload. We understand, however, that such a recommendation may not be feasible in many areas, given the costs of data plans, or the technical knowledge needed to transfer recordings. Furthermore, although most differences in recording devices were not significant, that does not mean that there were no differences in measurements.

4.5 Recommendations about software programs

For online recording, Cleanfeed performed overall the closest to the gold standard solid state recordings. However, this program does not make video recordings. We understand that using audio recording alone is problematic for general language documentation, and that there are many advantages to being able to see one's interlocutor, as well as the screen-sharing and other features that programs like Zoom and Skype bring. However, if the primary goal is comparable acoustic phonetic measurements, Cleanfeed is preferable. Other video-based services (that we did not test) may also be preferable to Zoom or Skype. Facebook Messenger should be avoided; it consistently produced measurements that substantially differed from our solid state recorder and which were often very different from the measurements produced by other programs and devices. These issues seem to be traceable to Messenger and not to Audacity, given the more limited effects of using Audacity alone.

If video is necessary, Skype and Zoom are similar to each other in reliability. Both produce some artefacts, so it is very important to document what software was used. The two programs handle noise differently, in a way that produces divergent COG effects and might also produce differences in other measurements.

In order to facilitate comparisons across different recordings, it is important to use the same software program across speakers and across recording sessions. While the absolute measurements are altered to some degree by all of these applications, using the same application for all recordings will at least ensure that artefacts do not produce apparent variability across speakers, across tasks, or based on other factors that also vary between recordings.

One additional factor to consider that was not addressed within our study is the internet connection. All of our virtual recordings were made over stable high-speed¹¹ connections. When the connection is weak, many issues are likely to arise from the speech signal cutting out, which can cause major distortions or omit words entirely. Some programs include greater compression to handle slower connections, so measurements that were reliable for recordings made over a fast connection will not necessarily be reliable when made over a slower connection. Thus, it is preferable to record locally whenever possible and subsequently share those recordings, rather than making the recording over an internet connection.

5 Conclusions

The ubiquity and relative auditory fidelity of online voice platforms and portable devices have led linguists to be more comfortable using such systems in field research. Covid-related restrictions and lockdowns have made it difficult or impossible to conduct in-person field research. We tested the feasibility of using these online solutions in a remote recording situation, by comparing a recording made on a solid-state recorder against the same recording after being fed through various software programs and recorded on different devices. We found that all options distort the signal in some fashion, and give recommendations for best practices: local recordings are best when possible, and the recording set-up should be consistent across recording sessions. For all recordings, both in-person and remote, researchers should document all aspects of the recording setup, including devices and software programs, in order to facilitate future interpretation of the data.

¹¹ Broad-band cable internet at one end, fiber-optic-to-curb at the other.

References

- Barwick, L. (2006). A musicologist's wishlist: some issues, practices and practicalities in musical aspects of language documentation. *Language documentation and description*, 3(2005), 53–62.
- Bates, Douglas, Martin Mächler, Ben Bolker & Steve Walker. 2015. Fitting linear mixed-effects models using lme4. *Journal of Statistical Software*, 67(1), 1–48.
- Bird, Steven, & Gary Simons. 2003. Seven dimensions of portability for language documentation and description. *Language*, 79(3), 557–582.
- Bird, Steven, Florian R. Hanke, Oliver Adams, & Haejoong Lee. 2014. Aikuma: A Mobile App for Collaborative Language Documentation. *Proceedings of the 2014 Workshop on the Use of Computational Methods in the Study of Endangered Languages*, 1–5. Association for Computational Linguistics. (<http://dx.doi.org/10.3115/v1/W14-2201>)
- Boersma, Paul & David Weenink. 2017. Praat: Doing phonetics by computer (Version 6.0.30) [Computer program]. Retrieved September 29, 2017, from <http://www.praat.org/>.
- Bowern, Claire. 2015. *Linguistic fieldwork: A practical guide*. 2nd edition. Springer.
- de Decker, Paul & Jennifer Nycz. 2015. For the record: Which digital media can be used for sociophonetic analysis? *University of Pennsylvania Working Papers in Linguistics*, 17(2), Article 7.
- Drude, Sebastian, Trilsbeek, Paul, & Broeder, Daan. (2011). The 'Language Archiving Technology' solutions for sustainable data from digital research. *Sustainable data from digital research: Humanities perspectives on digital scholarship. Proceedings of the conference held at the University of Melbourne, 12–14th December 2011*. (<http://hdl.handle.net/2123/7935>)
- Evanini, Keelan, Stephen Isard and Mark Liberman. 2009. Automatic formant extraction for sociolinguistic analysis of large corpora. Tenth Annual Conference of the International Speech Communication Association. <http://languagelog ldc.upenn.edu/myl/BayesianFormants.pdf>.
- Goldman, Jean-Philippe, Adrian Leemann, Marie-José Kolly, Ingrid Hove, Ibrahim Almajai, Volker Dellwo & Steven Moran. 2014. A Crowdsourcing Smartphone Application for Swiss German: Putting Language Documentation in the Hands of the Users. *European*

- Language Resources Association (ELRA). <https://doi.org/10.5167/UZH-103791>.
<https://www.zora.uzh.ch/id/eprint/103791> (21 January, 2021).
- Gordon, Matthew, Paul Barthmaier & Kathy Sands. 2002. A cross-linguistic acoustic study of voiceless fricatives. *Journal of the International Phonetic Association*, 32(2), 141–174.
- Hall-Lew, Lauren & Zac Boyd. 2017. Phonetic Variation and Self-Recorded Data. *University of Pennsylvania Working Papers in Linguistics* 23(2).
<https://repository.upenn.edu/pwpl/vol23/iss2/11>.
- Hou, Lynn, Ryan Lopic & Erin Wilkinson. 2020. Working with ASL Internet Data. *Sign Language Studies*. Gallaudet University Press, 21(1). 32–67. <https://doi.org/10/ghmbkz>.
- Johnson, Keith. (2008). *Quantitative methods in linguistics*. Blackwell Publishing, Ltd.
- Johnson, Lisa M., Marianna Di Paolo & Adrian Bell. 2018. Forced Alignment for Understudied Language Varieties: Testing Prosodylab-Aligner with Tongan Data. *Language Documentation & Conservation*, 12. 80–123.
- Künzel, H. J. 2001. Beware of the ‘telephone effect’: The influence of telephone transmission on the measurement of formant frequencies. *Forensic Linguistics* 8. 80–99.
- Kuznetsova, Alexandra, Per Bruun Brockhoff & Rune Haubo Bojesen Christensen. 2015. lmerTest: Tests in Linear Mixed Effects Models. <https://CRAN.R-project.org/package=lmerTest>. R package version 2.0-29.
- Labov, William, Sharon Ash, and Charles Boberg. 2006. *The Atlas of North American English: Phonetics, phonology and sound change*. Berlin: Walter de Gruyter.
- Leemann, Adrian, Péter Jeszenszky, Carina Steiner, Melanie Studerus & Jan Messerli. 2020. Linguistic fieldwork in a pandemic: Supervised data collection combining smartphone recordings and videoconferencing. *Linguistics Vanguard*. De Gruyter Mouton 6(s3).
<https://doi.org/10/ghk9xw>. <https://www.degruyter.com/view/journals/lingvan/6/s3/article-20200061.xml> (21 January, 2021).
- Liu, Chi-Min, Hsu, Han-Wen & Lee, Wen-Chieh. 2008. Compression artifacts in perceptual audio coding. *IEEE Transactions on Audio, Speech, and Language Processing*, 16(4), 681–695.
- Lucas, Ceil, Gene Mirus, Jeffrey L. Palmer, Nicholas J. Roessler & Adam Frost. 2013. The effect of new technologies on sign language research. *Sign Language Studies*, 13(4), 541–564.

- Lyons, Richard. 2011. *Understanding digital signal processing*, 3rd edn. Upper Saddle River, NJ: Prentice Hall.
- Lyons, Richard & D. Lee Fugal. 2014. *The essential guide to digital signal processing*. Upper Saddle River, NJ: Prentice Hall.
- Maddieson, Ian. 2001. Phonetic fieldwork. In Paul Newman and Martha Ratliff (eds.), *Linguistic Fieldwork*, 211–229. Cambridge: Cambridge University Press.
- Mihas, E. 2012. Subcontracting native speakers in linguistic fieldwork: A case study of the Ashéninka Perené (Arawak) research community from the Peruvian Amazon. *Language Documentation and Conservation*, 6, 1–21.
- Nash, Carlos Marcelo. (2001) "Evaluating the use of adaptive transform acoustic coding (ATRAC) data compression in acoustic phonetics." Master's Thesis, Rice University. <https://hdl.handle.net/1911/17453>.
- Pierce, Jonathan W. 2007. PsychoPy – Psychophysics software in Python. *Journal of Neuroscience Methods*, 162(1-2), 8–13.
- Podesva, Robert & Elizabeth Zsiga. 2013. Sound recordings: Acoustic and articulatory data. In Robert Podesva & Devyani Sharma (Eds.), *Research methods in linguistics* (169-194). Cambridge: Cambridge University Press.
- Purnell, Thomas, Eric Raimy & Joseph Salmons. 2013. Making linguistics matter: Building on the public's interest in language. *Language and Linguistics Compass*, 7(7), 398–407.
- Rathcke, Tamara, Jane Stuart-Smith, Bernard Torsney & Jonathan Harrington. 2017. The beauty in a beast: Minimising the effects of diverse recording quality on vowel formant measurements in sociophonetic real-time studies. *Speech Communication*, 86. 24-41.
- Salesky, Elizabeth, Eleanor Chodroff, Tiago Pimentel, Matthew Wiesner, Ryan Cotterell, Alan W. Black & Jason Eisner. 2020. A Corpus for Large-Scale Phonetic Typology. *arXiv:2005.13962 [cs]*. <http://arxiv.org/abs/2005.13962> (21 January, 2021).
- Seyfeddinipur, Mandana, & Rau, Felix. 2020. Keeping it real: Video data in language documentation and language archiving. *Language Documentation & Conservation*, 14, 503–519.
- Sneller, Betsy. 2021. Workshop: Sociolinguistic research in the time of COVID: Methods, Ethics, Theory Workshop at the Annual Meeting of the Linguistic Society of America.

- van Son, R.J.J.H. 2005. A study of pitch, formant, and spectral estimation errors introduced by three lossy speech compression algorithms. *Acta Acustica United with Acustica*, 91, 771–778.
- Sun Lingfen, Mkwawa, Is-Haka, Jammeh Emmanuel, & Ifeachor Emmanuel. 2013. Speech Compression. In: *Guide to Voice and Video over IP. Computer Communications and Networks*. Springer, London.
- Whalen, Douglas H., Christian DiCanio & Rikker Dockum. 2020. Phonetic documentation in three collections: Topics and evolution. *Journal of the International Phonetic Association*. FirstView Online, 1–27.
- Zölzer, Udo. 2008. *Digital audio signal processing*, 2nd edn. UK: Wiley.

Supplementary Materials

The supplementary materials contain further information about the statistical models used to test each effect and further discussion of the results from individual measurements, including effects which did not reach significance. See the main text (Section 3) for an overview of the results.

Some of the points that are included in the main text are also presented in the supplementary materials, in order to provide a complete presentation of the results here.

1 Further information about recording devices and software

Table S1 below provides further information about the devices used in Phase 1 of the recording. The numbers refer to the photograph of the setup in Figure 1 of the main text.

Table S1. Specifications for recorders used.

Number	Device	Specifications	Output
1	Zoom H4n	uncompressed, 44,100 Hz sampling rate, internal microphone; recorder is c. 3 years old	wav
2	iPad	8th generation, iOS 14, on airplane mode, using VoiceMemos, internal microphone, “compressed” setting	m4a
3	Macbook Pro	running OS 10.15 (Catalina), using internal microphone recording to Audacity, running Psychopy to present the stimuli	wav
4	Macbook Pro	running OS 10.15 (Catalina), using external microphone recording to Audacity, recording with mid 2015 Audio Technica headset microphone using iXr external sound card	wav
5	Android phone	model LM-X320TA, running Android version 9, recording with the built-in application Audio Recorder (the settings do not give options for compression)	m4a
6	iPhone	iPhone 6s, iOS 14, recording with internal microphone using VoiceMemos, uncompressed format	m4a

For the software conditions (Phase 2 of the recording), we chose to test video conferencing software that, we believe, are commonly being used in remote field recordings. These included Zoom, Skype, Facebook Messenger (recorded through Audacity, because it does not have an in-app recording option), the web-based podcast program Cleanfeed,¹ and Audacity (without any virtual transmission, to distinguish between effects of Messenger and effects of Audacity). We chose only free recording programs. Since the settings of some of these software programs can vary results substantially, we specify our recording setup below. All settings and program versions were up to date as of November 2020.

Zoom (v 5.3.1): We tested three configurations: remote recording vs locally recorded; and in the remote condition, compressed vs “original sound”² (without echo cancellation), and extracted from video vs audio only. The two remote recordings were done on a Mac and a Windows PC, with the former being set to “original sound” and the latter recording with the default, compressed settings. The local recording was also done on a Mac. Files were output as wav (audio only) or mp4 (audio and video)

Skype: We recorded the call using Skype’s built-in recording feature that captures audio and video. The local recording was done on a Mac running 10.14, and the remote recording on a PC with Windows 10 (Skype v 8.65.0.78.). Files are saved as mp4.

Messenger/Audacity: Facebook Messenger is a widely used application for linguistic fieldwork. Although there is no built-in recording system, we used Audacity (version 2.4.2) running in the background of the remote recorder’s PC to record the call's audio. Audacity is widely used by fieldworkers as a way to record audio directly from a computer sound card (cf. Mihás 2012; Johnson et al 2018; Purnell et al 2013). Files were saved in Audacity as uncompressed 16bit wav. To distinguish between effects of Messenger and effects of Audacity, a second condition used Audacity alone; as in the other condition, the sound card was treated as audio input to the Audacity program.

¹ Since consultants may use their phones during remote elicitation sessions, we also considered the inclusion of phone apps in our remote recording conditions (that is, where the audio signal is played through the cellphone or tablet and recorded remotely). However, logistical issues with recording and the already ballooning number of testing configurations led us to exclude this condition from Phase 2. For example, Messenger’s mobile app also does not seem to allow recording apps to run in the background and record the call. Some other apps on iOS devices are allowed to run in the background while recording, but they use the Voice memo app, which was already tested in our “device” condition in Phase 1. Most crucially, our method of using the H4n to play our recordings was unreliable on phones and tablets, where the external source did not reliably select the device as the microphone input. An external sound card would have perhaps allowed this, at the expense of testing the device audio itself.

² According to Zoom’s settings, the “original sound” option “disables noise suppression, removes high pass filtering, and automatic gain control.”

CleanFeed: This is an online platform (<https://cleanfeed.net/>) that allows the user who initiates the call to manage the settings and make audio recordings. In our case, the “remote” recorder (in the role of fieldworker) initiated and recorded the call, and this was done on a PC running Windows 10. Cleanfeed also has options of muting speakers and selecting which channel to record. Our settings were such that the remote recorder was muted and only the audio stream playing the stimuli was recorded. Files are saved as wav.

The recordings from CleanFeed and Messenger (through Audacity) did not include videos. Software such as Zoom and Skype provide the option to extract audio tracks, but given that a) the quality of the audio file is not altered by the presence or absence of video and b) remote fieldworkers may find videos useful to see certain articulatory features (such as rounding), facilitate general communication with the linguistic consultant, or for sign language research, we included video recording where possible. However, we did not further analyze the video recordings except to extract the audio signal. Similar issues raised in this paper for audio fieldwork probably also apply to fieldwork with sign languages, particularly the horizontal compression identified in Section 3 below. See Lucas et al (2013) for further discussions of sign language fieldwork, and Hou et al (2020) on strategies for web-based sign language data collection and annotation.

2 Results

2.1 Effects of Device

Because of a technical issue, one of the recordings for one of the speakers was lost, so the analyses of effects by device only include two speakers instead of three.

2.1.1 Overall device effects

Table S2 presents the summary of a linear mixed effects model for consonant duration (in ms) as predicted by the device. There was a random intercept for speaker.

Several of the conditions found significantly different consonant duration than the baseline H4n recorder, as is discussed in the main text.

Table S2. Linear mixed effects model for consonant duration (in milliseconds)

	Estimate	SE	t-value	p
(Intercept)	116.611	2.549	45.755	< 2e-16
Device Android	-2.837	3.604	-0.787	0.43135
Device ExternalComputerMic	4.736	3.604	1.314	0.18900

Device InternalComputerMic	-9.567	3.604	-2.654	0.00799
Device iPad	-9.038	3.604	-2.508	0.01221
Device iPhone	-4.880	3.604	-1.354	0.17589

Reference level Program = zoomH4n

Table S3 presents the summary of a linear mixed effects model for vowel duration (in ms) as predicted by the device. There was a random intercept for speaker.

Vowels were significantly longer than the baseline standard in the iPad condition. The differences in consonant duration seen above appear to be largely offset by the differences in vowel duration. That is, those conditions where the vowels are shorter are the same ones where the consonants are longer. Note, however, that the magnitude of the effects is overall quite small; less than 10 ms for most cases (which is the level of resolution of the forced aligner).

Table S3. Linear mixed effects model for vowel duration (in milliseconds)

	Estimate	SE	t-value	p
(Intercept)	164.275	12.762	12.872	0.0245
Device Android	4.292	7.009	0.612	0.5404
Device ExternalComputerMic	-4.906	7.009	-0.700	0.4841
Device InternalComputerMic	8.160	7.009	1.164	0.2445
Device iPad	15.519	7.009	2.214	0.0270
Device iPhone	6.085	7.009	0.868	0.3855

Reference level Program = zoomH4n

Table S4 presents the summary of a linear mixed effects model for consonant intensity as predicted by the device. There was a random intercept for speaker.

Intensity of consonants was substantially lower in all of the test conditions than in the baseline standard. Of course, the crucial measurement of intensity for acoustic analysis is not the absolute intensity but in relative intensity across segments, which will be addressed in subsequent sections. Other factors such as distance from the microphone also impact intensity. The H4n device was closest to the speaker, apart from the headset audio, but all other devices were positioned to be a reasonable recording distance from the speaker and showed “reasonable” levels when tested (see also the signal-to-noise ratio tests below).

Table S4. Linear mixed effects model for consonant intensity (in dB)

	Estimate	SE	t-value	p
(Intercept)	66.4853	1.3796	48.19	0.0097

Device Android	-6.5904	0.4263	-15.46	<2e-16
Device ExternalComputerMic	-26.3420	0.4263	-61.79	<2e-16
Device InternalComputerMic	-15.9723	0.4263	-37.47	<2e-16
Device iPad	-5.3903	0.4263	-12.64	<2e-16
Device iPhone	-8.0363	0.4263	-18.85	<2e-16

Reference level Program = zoomH4n

Table S5 presents the summary of a linear mixed effects model for vowel intensity as predicted by the device. There was a random intercept for speaker.

Intensity of vowels was substantially lower in all of the test conditions than in the baseline standard. As for consonants, the crucial aspects of intensity are not in the absolute intensity but in relative intensity, which will be addressed in subsequent sections.

Table S5. Linear mixed effects model for vowel intensity (in dB)

	Estimate	SE	t-value	p
(Intercept)	76.7020	0.6484	118.30	0.00199
Device Android	-6.0573	0.3117	-19.43	< 2e-16
Device ExternalComputerMic	-23.3246	0.3117	-74.83	< 2e-16
Device InternalComputerMic	-19.3934	0.3117	-62.22	< 2e-16
Device iPad	-7.8537	0.3117	-25.20	< 2e-16
Device iPhone	-10.6683	0.3117	-34.23	< 2e-16

Reference level Program = zoomH4n

Table S6 presents the summary of a linear mixed effects model for mean f0 (in Hz) in vowels as predicted by the device. There was a random intercept for speaker.

There were no significant effects of Device on mean f0, though f0 was marginally lower in the iPad and iPhone conditions. In a larger dataset, the effect might reach significance. However, it is worth noting that the differences in measured f0 are small relative to the expected size of phonological f0 patterns.

Figure S1 presents the distribution of f0 measurements for each speaker. Given the similar distributions across conditions, the different results are unlikely to be the result of pitch tracking errors. None of the conditions excluded more than 5 tokens as unmeasurable, so the results are also not the result of different exclusions. The differences might be related to the differing boundary assignments in each condition, as also reflected in the duration differences. Different boundaries could reduce extrinsic f0 effects of voicing of the neighboring consonants.

Table S6. Linear mixed effects model for mean f0 (in Hz) in vowels

	Estimate	SE	t-value	p
(Intercept)	180.4255	5.1420	35.089	0.0105
Device Android	1.0195	2.1640	0.471	0.6377
Device ExternalComputerMic	0.9822	2.1745	0.452	0.6516
Device InternalComputerMic	-0.9832	2.1666	-0.454	0.6501
Device iPad	-3.3059	2.1666	-1.526	0.1273
Device iPhone	-3.5911	2.1666	-1.657	0.0977

Reference level Program = zoomH4n

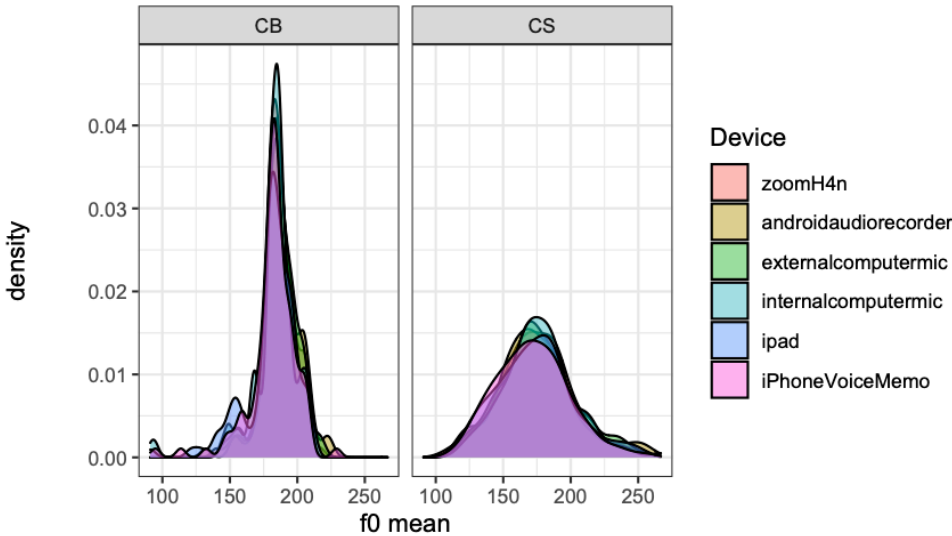


Figure S1. Density plots for the mean f0

Table S7 presents the summary of a linear mixed effects model for peak timing (in ms) -- the position of the maximum f0 relative to the beginning of the vowel, as predicted by the recording program. There was a random intercept for speaker.

There were no significant effects of Device on peak timing, but there were suggestive trends for Android and ExternalComputerMic which could be expected as a side effect of differences in vowel duration, because when the beginning of the vowel is put earlier, then the peak occurs later relative to that boundary. The size of the differences are small, though they are large enough relative to the size of actual peak timing effects that they could alter results. Many of the differences are due to how many items identify the peak f0 as occurring at the beginning of the vowel, which could be a result of the differences in the boundary identified for the beginning of the vowel.

Table S7. Linear mixed effects model for f0 peak timing (in milliseconds)

	Estimate	SE	t-value	p

(Intercept)	27.5097	3.1934	8.615	<2e-16
Device Android	6.5905	4.5161	1.459	0.145
Device ExternalComputerMic	7.3755	4.5379	1.625	0.104
Device InternalComputerMic	-2.8760	4.5215	-0.636	0.525
Device iPad	-0.5996	4.5215	-0.133	0.895
Device iPhone	-4.4420	4.5215	-0.982	0.326

Reference level Program = zoomH4n

Table S8 presents the summary of a linear mixed effects model for jitter in vowels as predicted by the device, i.e. the cycle-to-cycle variation in f0. There was a random intercept for speaker.

There were no significant effects of Device on jitter measurements, which is consistent with generally reliable f0 measurements.

Table S8. Linear mixed effects model for jitter in vowels

	Estimate	SE	t-value	p
(Intercept)	2.096E-02	1.707E-03	12.279	0.00251
Device Android	3.099E-04	1.614E-03	0.192	0.84781
Device ExternalComputerMic	-1.174E-03	1.622E-03	-0.724	0.46920
Device InternalComputerMic	-9.038E-04	1.614E-03	-0.560	0.57567
Device iPad	2.17E-03	1.614E-03	1.344	0.17910
Device iPhone	1.878E-03	1.614E-03	1.163	0.24491

Reference level Program = zoomH4n

Table S9 presents the summary of a linear mixed effects model for spectral tilt (H1-H2) in vowels as predicted by the device. There was a random intercept for speaker.

Spectral tilt was significantly lower in the Android condition, and marginally higher in the iPhone condition. Even the differences that were not significant are rather large relative to the size of meaningful spectral tilt differences. The differences might indicate variation in how well the devices record higher and lower frequencies. The differences do not seem to be the result of distance from the speaker; the phones and the baseline H4n device were similarly close to the speaker, and the phones have opposite effects.

Table S9. Linear mixed effects model for spectral tilt in vowels

	Estimate	SE	t-value	p
(Intercept)	-2.0230	1.9575	-1.033	0.4793

Device Android	-1.4641	0.5865	-2.496	0.0127
Device ExternalComputerMic	-0.9286	0.5865	-1.583	0.1136
Device InternalComputerMic	-0.5693	0.5865	-0.971	0.3319
Device iPad	0.4055	0.5865	0.691	0.4895
Device iPhone	1.0142	0.5865	1.729	0.0840

Reference level Program = zoomH4n

Table S10 presents the summary of a linear mixed effects model for Harmonics-to-Noise Ratio (HNR) in vowels as predicted by the device. There was a random intercept for speaker. HNR was significantly lower in the InternalComputerMic condition, indicating more noise in this condition than the baseline condition. This might be due to distance from the speaker; this microphone was the furthest from the speaker (see the setup diagram in Figure 1 of the main text). Impressionistically, internal computer microphones also pick up more noise from computer fans.

Table S10. Linear mixed effects model for HNR in vowels

	Estimate	SE	t-value	p
(Intercept)	6.44752	1.30502	4.941	0.115
Device Android	0.59172	0.36914	1.603	0.109
Device ExternalComputerMic	0.03904	0.37002	0.106	0.916
Device InternalComputerMic	-1.53328	0.36914	-4.154	3.49E-05
Device iPad	-0.33760	0.36914	-0.915	0.361
Device iPhone	-0.23160	0.36914	-0.627	0.531

Reference level Program = zoomH4n

Table S11 presents the summary of a linear mixed effects model for F1 in vowels as predicted by the device. There was a random intercept for speaker.

Overall, there weren't significant effects of device on F1, though there was a trend in the iPhone condition for lower F1. These results might be related to the trend also found in spectral tilt; formant measurements are influenced by how the formants align with the harmonics (Chen, Whalen & Shadle 2019). The lack of effect doesn't necessarily indicate that formants were being measured accurately, just that errors are not consistent across different vowels. Differences in how each vowel is impacted by condition are presented at the end of Section 2.1.2.

Table S11. Linear mixed effects model for F1 in vowels

	Estimate	SE	t-value	p
(Intercept)	632.378	31.818	19.875	0.0154
Device Android	-7.270	16.535	-0.440	0.6602
Device ExternalComputerMic	-8.698	16.535	-0.526	0.5990
Device InternalComputerMic	-19.802	16.535	-1.198	0.2313
Device iPad	-15.204	16.535	-0.920	0.3580
Device iPhone	-25.717	16.535	-1.555	0.1201

Reference level Program = zoomH4n

Table S12 presents the summary of a linear mixed effects model for F2 in vowels as predicted by the device. There was a random intercept for speaker.

F2 was significantly lower than the baseline measurement in the InternalComputerMic condition, significantly higher in the iPad condition, and marginally higher in the iPhone condition. The results vary substantially for different vowels, as is presented at the end of Section 2.1.2 below. The largest effects seem to be attributable to diphthongization of high and mid-high tense vowels, so failure to capture the trajectory of the formants within the vowel results in altered estimation of the mean F2.

Table S12. Linear mixed effects model for F2 in vowels

	Estimate	SE	t-value	p
(Intercept)	1946.291	63.350	30.723	0.006240
Device Android	56.771	38.047	1.492	0.135916
Device ExternalComputerMic	-33.536	38.047	-0.881	0.378246
Device InternalComputerMic	-77.405	38.047	-2.034	0.042113
Device iPad	145.046	38.047	3.812	0.000144
Device iPhone	70.555	38.047	1.854	0.063913

Reference level Program = zoomH4n

Table S13 presents the summary of a linear mixed effects model for Center of Gravity (COG) in fricatives as predicted by the device. There was a random intercept for speaker.

The overall measurements were far higher in the ExternalComputerMic and InternalComputerMic conditions. The other effects aren't significant, but that is mostly a side effect of the very large standard error when we pool across fricatives. The main effects were driven by the alveolars. Measurement of COG in alveolars was probably somewhat unstable

because all of the recordings were downsampled to 16000 Hz, which cut off some of the frication of alveolars, leaving them more susceptible to being influenced by noise.

Table S13. Linear mixed effects model for COG for fricatives

	Estimate	SE	t-value	p
(Intercept)	2840.269	457.272	6.211	0.037050
Device Android	440.275	339.894	1.295	0.195755
Device ExternalComputerMic	1172.508	339.894	3.450	0.000605
Device InternalComputerMic	1115.225	339.894	3.281	0.001100
Device iPad	-196.658	339.894	-0.579	0.563108
Device iPhone	125.322	339.894	0.369	0.712488

Reference level Program = zoomH4n

2.1.2 Impact on contrasts

Effects in these characteristics are primarily a concern if they alter our ability to find contrasts. In this section, we test whether contrasts depending on these characteristics are altered by the recording device. These contrasts were selected as contrasts that are known to exist in English and which should be reflected by the measurements that we are using. When the regression models found no significant interaction between Device and the phonological categories, the results are illustrated just with a figure.

Stress in vowels

Figure S2 illustrates vowel duration as influenced by stress. The device did not have any substantial impact on these measurements, even though the overall vowel duration measurements were influenced by device. The effect of stress is significant or marginally significant in all conditions, and of a similar size.

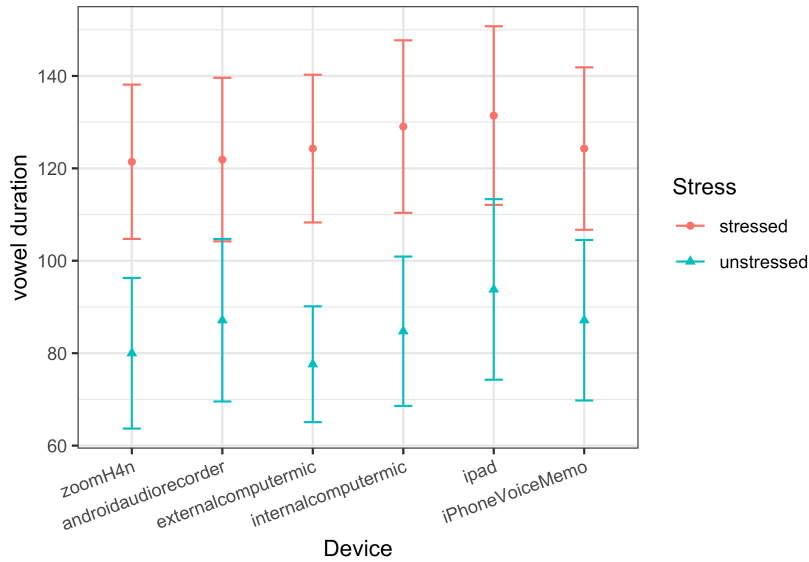


Figure S2. Measured vowel duration as predicted by device and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S3 illustrates vowel intensity as influenced by stress. While the differences between the devices aren't significant, the effect of stress is reduced in the internal computer mic condition and only marginally significant when examined in that condition. However, it is important to note that the extremely large variation in absolute intensity as measured by the different devices causes the differences in relative intensity to differ by condition, so the results could differ based on whether intensity is measured relatively or absolutely.

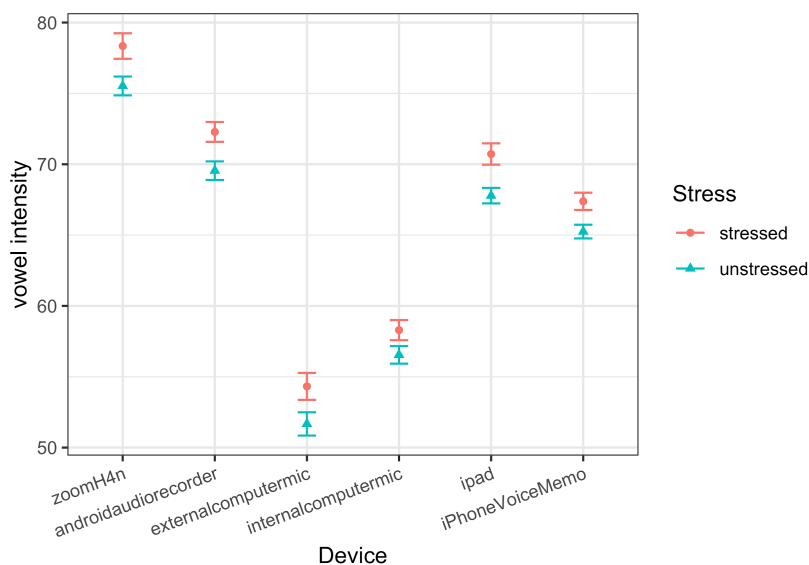


Figure S3. Measured vowel intensity as predicted by device and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S4 illustrates maximum f0 in vowels as influenced by stress. There are no substantial effects; all of the conditions find a significant effect, of a similar size.

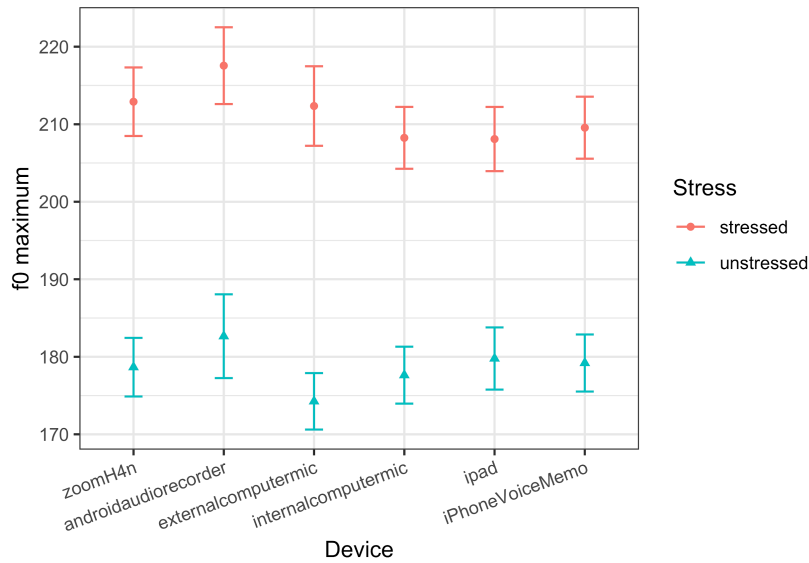


Figure S4. Measured F0 maximum as predicted by device and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Coda voicing

Figure S5 illustrates vowel duration as influenced by coda voicing. There are no substantial effects, although overall vowel duration differs across devices; all of the conditions find a significant effect, though some of them seem to be overestimating the effect, which could be a concern.

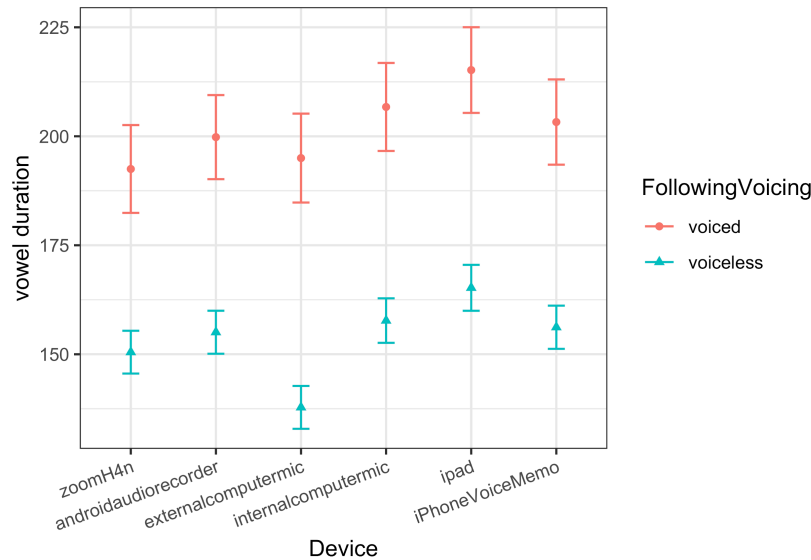


Figure S5. Measured vowel duration as predicted by device and coda voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Table S14 presents the summary of a linear mixed effects model for HNR in vowels as predicted by the device and the coda voicing. There was a random intercept for speaker.

Vowels followed by voiceless codas generally have a lower HNR than vowels before voiced codas. None of the interactions reach significance, though several of the conditions seem to be underestimating the size of the effect, which is consistent with those conditions overall having more noise and thus lower HNR. Figure S6 illustrates HNR in vowels as influenced by coda voicing.

Table S14. Linear mixed effects model for HNR in vowels, including coda voicing as a factor

	Estimate	SE	t-value	p
(Intercept)	8.67151	1.15165	7.530	0.04715
Device Android	0.54697	0.61259	0.893	0.37216
Device ExternalComputerMic	0.38014	0.61259	0.621	0.53506
Device InternalComputerMic	-1.99212	0.61259	-3.252	0.00119
Device iPad	-0.89867	0.61259	-1.467	0.14272
Device iPhone	-0.55193	0.61259	-0.901	0.36784
FollowingVoicing Voiceless	-4.10680	0.52975	-7.752	2.37E-14
Device Android:FollowingVoicing Voiceless	0.03413	0.74908	0.046	0.96367
Device	-0.66437	0.74967	-0.886	0.37573

ExternalComputerMic:FollowingVoicing Voiceless				
Device InternalComputerMic:FollowingVoicing Voiceless	0.61367	0.74908	0.819	0.41286
Device iPad:FollowingVoicing Voiceless	0.82612	0.74908	1.103	0.27038
Device iPhone:FollowingVoicing Voiceless	0.43339	0.74908	0.579	0.56302

Reference level Program = zoomH4n, FollowingVoicing = voiced

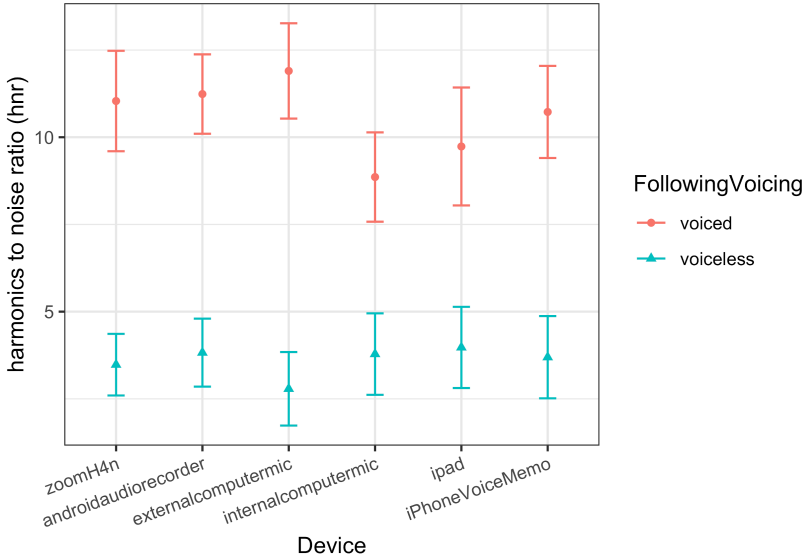


Figure S6. Measured HNR as predicted by device and coda voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Onset voicing

Table S15 presents the summary of a linear mixed effects model for HNR in vowels as predicted by the device and the onset voicing. There was a random intercept for speaker.

As with coda voicing, the HNR differences between voiced and voiceless onsets are decreased for the InternalComputerMic, iPad and iPhone devices, but the difference was only marginally significant even in the baseline condition. The issue here might be about boundary assignment, if vowels are only considered to begin when there is clear modal voicing. Figure S7 illustrates HNR in vowels as influenced by onset voicing.

Table S15. Linear mixed effects model for HNR in vowels, including onset voicing as a factor

	Estimate	SE	t-value	p
(Intercept)	6.9262	1.3827	5.009	0.08642
Device Android	0.7046	0.6822	1.033	0.30200
Device ExternalComputerMic	0.1822	0.6852	0.266	0.79039
Device InternalComputerMic	-1.7703	0.6822	-2.595	0.00962
Device iPad	-0.5400	0.6822	-0.792	0.42886
Device iPhone	-0.4673	0.6822	-0.685	0.49357
PrecedingVoicing Voiceless	-1.3364	0.6213	-2.151	0.03177
Device Android:PrecedingVoicing Voiceless	-0.2049	0.8787	-0.233	0.81570
Device ExternalComputerMic:Preceding Voicing Voiceless	-0.3530	0.8820	-0.400	0.68908
Device InternalComputerMic:Preceding Voicing Voiceless	0.5297	0.8787	0.603	0.54678
Device iPad:PrecedingVoicing Voiceless	0.3498	0.8787	0.398	0.69063
Device iPhone:PrecedingVoicing Voiceless	0.4118	0.8787	0.469	0.63948

Reference level Program = zoomH4n, PrecedingVoicing = voiced

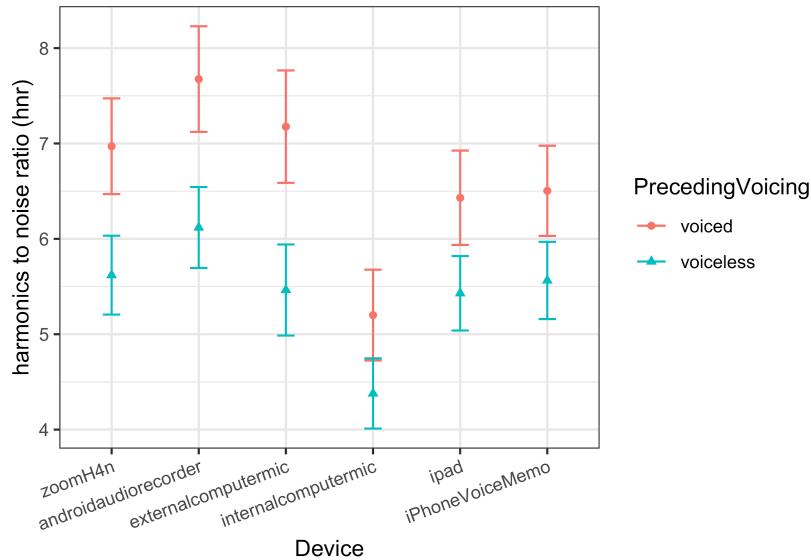


Figure S7. Measured HNR as predicted by device and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Table S16 presents the summary of a linear mixed effects model for spectral tilt in vowels as predicted by the device and the onset voicing. There was a random intercept for speaker.

The effect is only marginally significant in the baseline condition; it is only a small effect, but has been established elsewhere (e.g. Kong, Beckman & Edwards 2012). Though most of the differences are not significant, it is important to note that they are large relative to the size of the actual effect; there are clear distortions of spectral tilt, which are likely to obscure measurements. Figure S8 illustrates spectral tilt in vowels as influenced by onset voicing.

Table S16. Linear mixed effects model for spectral tilt in vowels, including onset voicing as a factor

	Estimate	SE	t-value	p
(Intercept)	-2.4475	2.1516	-1.138	0.4235
Device Android	-1.2556	1.0935	-1.148	0.2512
Device ExternalComputerMic	-1.2714	1.0935	-1.163	0.2453
Device InternalComputerMic	-0.4183	1.0935	-0.383	0.7022
Device iPad	0.2316	1.0935	0.212	0.8323
Device iPhone	0.8566	1.0935	0.783	0.4336
PrecedingVoicing Voiceless	1.7847	0.9960	1.792	0.0735
Device Android:PrecedingVoicing	-0.9828	1.4085	-0.698	0.4855

Voiceless				
Device ExternalComputerMic:Preceding Voicing Voiceless	0.1420	1.4085	0.101	0.9197
Device InternalComputerMic:Preceding Voicing Voiceless	-0.9713	1.4085	-0.690	0.4906
Device iPad:PrecedingVoicing Voiceless	-0.2053	1.4085	-0.146	0.8841
Device iPhone:PrecedingVoicing Voiceless	-0.2397	1.4085	-0.170	0.8649

Reference level Program = zoomH4n, PrecedingVoicing = voiced

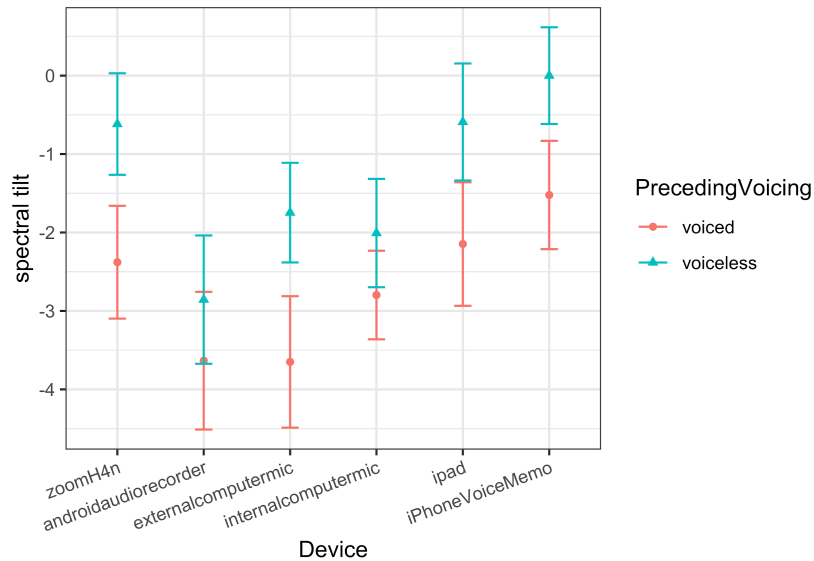


Figure S8. Measured spectral tilt as predicted by device and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S9 illustrates maximum f0 in vowels as influenced by onset voicing. None of the effects are significant, but there is variation in how large the effect is estimated to be.

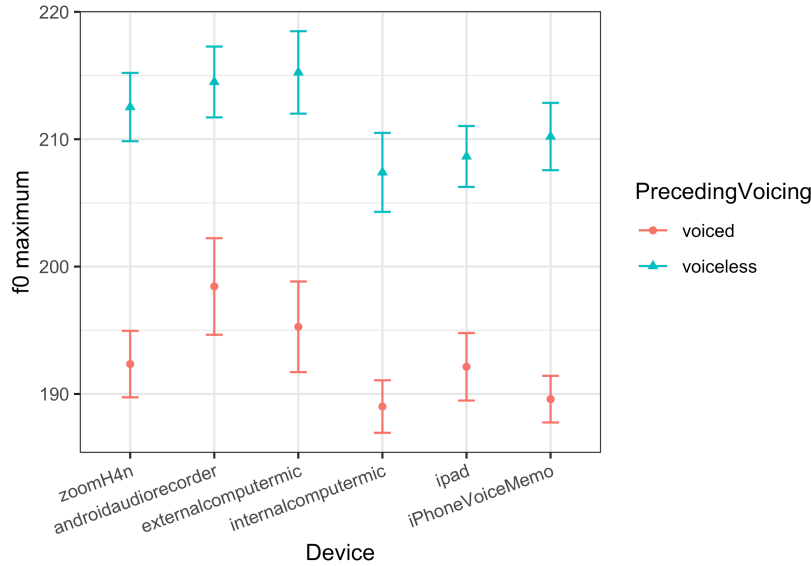


Figure S9. Measured f_0 maximum as predicted by device and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Consonant manner

Table S17 presents the summary of a linear mixed effects model for COG in /s/ vs. /ʃ/ as predicted by the device. There was a random intercept for speaker.

The model finds the same effect noted above for overall COG measurements: The COG for /s/ is overestimated in the ExternalComputerMic condition and the InternalComputerMic condition. The interactions show that /ʃ/ isn't as affected. Figure S10 illustrates COG by fricative.

Table S17. Linear mixed effects model for COG in sibilant fricatives, including particular fricative as a factor

	Estimate	SE	t-value	p
(Intercept)	5053.707	559.032	9.040	0.057593
Device Android	632.701	181.621	3.484	0.000577
Device ExternalComputerMic	1723.132	181.621	9.488	< 2e-16
Device InternalComputerMic	1359.688	181.621	7.486	1.01E-12
Device iPad	-460.416	181.621	-2.535	0.011810
Device iPhone	226.556	181.621	1.247	0.213330
Segment /ʃ/	-1689.318	254.164	-6.647	1.66E-10
Device Android:Segment /ʃ/	-496.482	359.437	-1.381	0.168341
Device ExternalComputerMic:Segment	-1587.648	359.437	-4.417	1.45E-05

/ʃ/				
Device InternalComputerMic:Segment /ʃ/	-763.061	359.437	-2.123	0.034673
Device iPad:Segment /ʃ/	301.010	359.437	0.837	0.403085
Device iPhone:Segment /ʃ/	-253.777	359.437	-0.706	0.480775

Reference level Program = zoomH4n, Segment = /s/

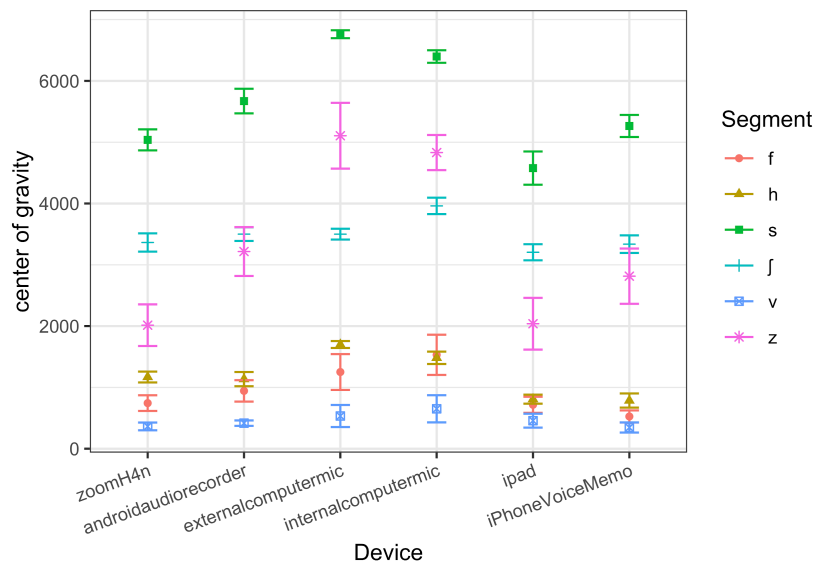


Figure S10. Measured center of gravity as predicted by device and segment, among fricatives. Pooled raw data, not the model results. Whiskers indicate the standard error.

Vowel quality

Figure S11 illustrates F1 and F2 as influenced by vowel quality and device. Adding the interaction between vowel quality and device does not significantly improve the model for F1 ($\chi^2 = 53.0$, $df = 55$, $p = 0.55$), likely because there are many combinations of vowel quality and device, with relatively few data points for each one. The interaction between vowel quality and device does significantly improve the model for F2 ($\chi^2 = 171.8$, $df = 55$, $p < 0.0001$); the measured F2 varies considerably across conditions for some vowels.

The device conditions in phase 1 all clearly pick out a recognizable vowel space. However, some of the vowels are shifted enough that they would be likely to cause problems for analysis. In particular, F2 measurements for /u/ and /ou/ were very high in many of the conditions; this is likely due to issues in identifying boundaries or tracking low-intensity formants, which altered which part of the diphthong were measured. Many of the words with /u/ lacked codas, so failure to capture the back portion of the offglide of the vowel resulted in only

measuring the frontier beginning portion. While other vowels didn't exhibit systematic effects, there are several vowels that have strikingly variable measurements across conditions.

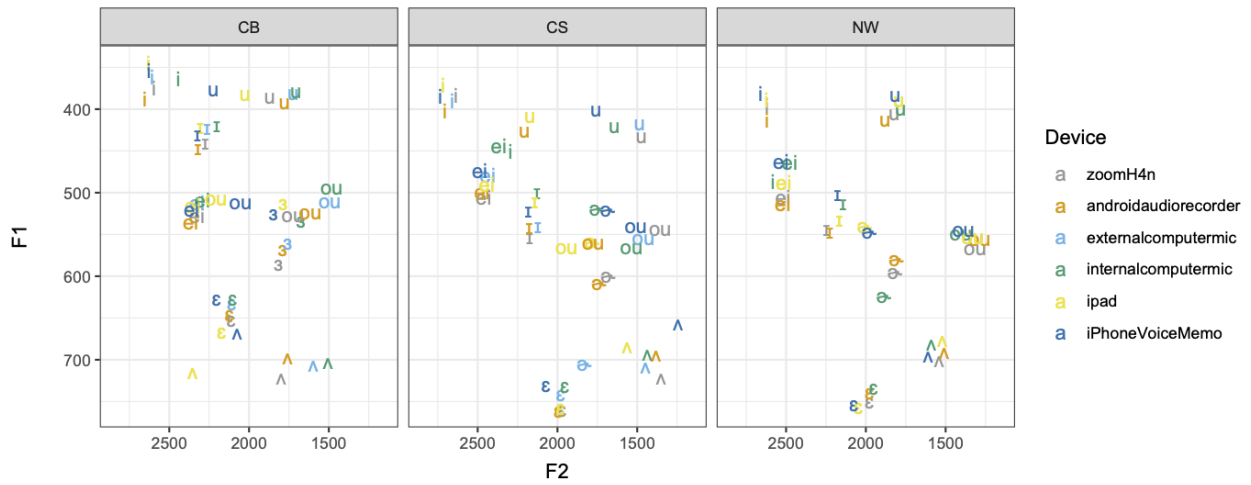


Figure S11. Vowel spaces for each speaker as measured in Phase 1 (by-Device).

Figure S12 illustrates F1 and F2 as influenced by vowel quality and device, pooled across the two speakers for whom there was data from all devices.

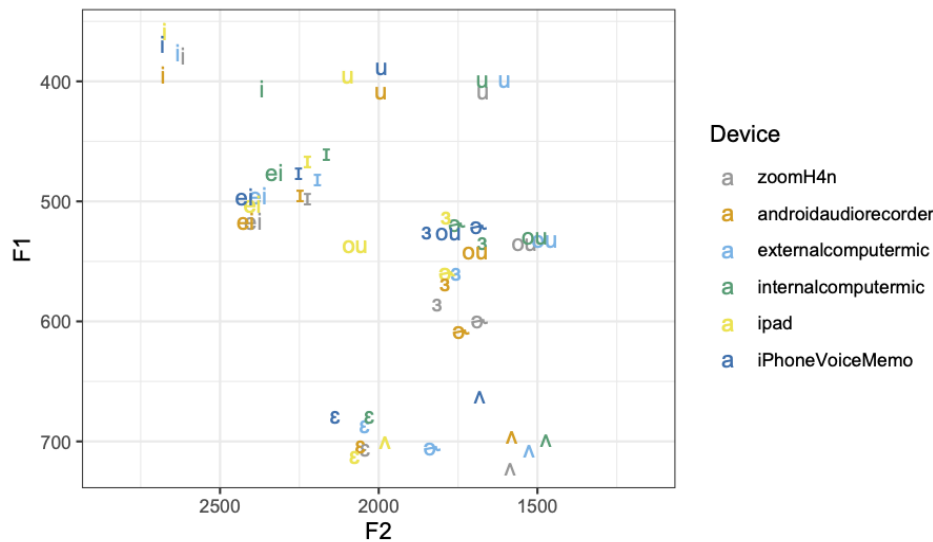


Figure S12: Vowel spaces pooled across speakers in Phase 1 (comparisons by Device). Only two speakers are included, because data for one condition was missing for one speaker.

2.2 Effects of Program

There were five software conditions compared to the H4n reference condition: Zoom, Skype, Cleanfeed, Facebook Messenger (recorded through Audacity, because it does not have an in-app recording option), and AudacityAlone. Note that four of these are testing applications for online

transmission, while AudacityAlone is present to test whether the Audacity program causes effects in itself, to clarify how to interpret the results of the Messenger condition.

For these comparisons, we used a single Zoom condition, recording locally with the default audio settings. Although we tested several different Zoom conditions, there were no differences between any of them: Local vs. remote, operating system, conversion from mp4, or the “Original Audio” setting. None of the characteristics measured exhibited significant effects of recording condition. The models comparing Zoom conditions to each other are presented in Section 1.3 below.

2.2.1 Overall effects

Table S17 presents the summary of a linear mixed effects model for consonant duration as predicted by the recording program. There was a random intercept for speaker.

There were no significant consonant duration differences between the baseline recording and the recording made through Cleanfeed or Audacity alone. However, consonant durations were significantly shorter in all of the other conditions. Recall that boundaries were created with forced alignment, as described above; the significant effects on duration suggest that the programs produced other effects, on intensity for example, which altered the boundaries identified by forced alignment. Some of the differences in duration might also reflect actual duration differences created by compression algorithms.

Table S17. Linear mixed effects model for consonant duration (in milliseconds)

	Estimate	SE	t-value	p
(Intercept)	106.8277	10.2552	10.417	0.00721
Program AudacityAlone	1.0855	2.8667	0.379	0.70497
Program Cleanfeed	-0.4416	2.8656	-0.154	0.87752
Program Messenger	-11.5773	2.8656	-4.040	5.45E-05
Program Skype	-8.5174	2.8656	-2.972	0.00297
Program Zoom	-11.2303	2.8656	-3.919	9.05E-05

Reference level Program = zoomH4n

Table S18 presents the summary of a linear mixed effects model for vowel duration as predicted by the recording program. There was a random intercept for speaker.

As for consonant duration, there were no significant vowel duration differences between the baseline recording and the recording made through Cleanfeed or AudacityAlone. However, vowel durations were significantly longer in all of the other conditions.

Table S18. Linear mixed effects model for vowel duration (in milliseconds)

	Estimate	SE	t-value	p
(Intercept)	157.1634	12.2843	12.794	0.00254
Program AudacityAlone	-0.8359	6.0478	-0.138	0.89008
Program Cleanfeed	0.3715	6.0478	0.061	0.95102
Program Messenger	17.4613	6.0478	2.887	0.00393
Program Skype	19.7833	6.0478	3.271	0.00109
Program Zoom	31.4551	6.0478	5.201	2.19E-07

Reference level Program = zoomH4n

Table S19 presents the summary of a linear mixed effects model for consonant intensity as predicted by the recording program. There was a random intercept for speaker.

All of the programs exhibited significantly lower consonant intensity than the baseline recording, except for AudacityAlone.

Table S19. Linear mixed effects model for consonant intensity (in dB)

	Estimate	SE	t-value	p
(Intercept)	67.11613	0.76802	87.388	1.31E-05
Program AudacityAlone	0.03219	0.42150	0.076	0.939
Program Cleanfeed	-3.78338	0.42133	-8.980	< 2e-16
Program Messenger	-27.28925	0.42133	-64.769	< 2e-16
Program Skype	-4.53062	0.42133	-10.753	< 2e-16
Program Zoom	-6.60118	0.42133	-15.668	< 2e-16

Reference level Program = zoomH4n

Table S20 presents the summary of a linear mixed effects model for vowel intensity as predicted by the recording program. There was a random intercept for speaker.

All of the programs exhibited significantly lower vowel intensity than the baseline recording, except for AudacityAlone.

Table S20. Linear mixed effects model for vowel intensity (in dB)

	Estimate	SE	t-value	p
(Intercept)	77.1778	0.3852	200.346	2.91E-10
Program AudacityAlone	0.3338	0.3489	0.957	0.339
Program Cleanfeed	-3.0245	0.3489	-8.669	< 2e-16
Program Messenger	-28.1522	0.3489	-80.693	< 2e-16
Program Skype	-3.3331	0.3489	-9.554	< 2e-16
Program Zoom	-6.1096	0.3489	-17.512	< 2e-16

Reference level Program = zoomH4n

Table S21 presents the summary of a linear mixed effects model for the mean f0 in vowels, as predicted by the recording program. There was a random intercept for speaker.

There was no significant effect on mean f0 in any of the conditions.

Table S21. Linear mixed effects model for mean f0 (in Hz) in vowels

	Estimate	SE	t-value	p
(Intercept)	181.0594	3.7589	48.168	0.000178
Program AudacityAlone	0.1701	1.4690	0.116	0.907816
Program Cleanfeed	-0.1390	1.4656	-0.095	0.924473
Program Messenger	-1.2796	1.4667	-0.872	0.383088
Program Skype	0.3327	1.4656	0.227	0.820425
Program Zoom	0.6292	1.4656	0.429	0.667743

Reference level Program = zoomH4n

Table S22 presents the summary of a linear mixed effects model for peak timing -- the position of the maximum f0 relative to the beginning of the vowel, as predicted by the recording program. There was a random intercept for speaker.

The peak timing was significantly later for Zoom than the baseline condition. This is probably due to the overestimated vowel duration, described above. Because the beginnings of the vowels were placed earlier, the peak f0 was later relative to that starting point. However, it is worth considering why none of the other conditions have effects on peak timing, when several of

them did have duration effects. The different results might be due to the size of the effect; MessengerThroughAudacity and Skype had smaller effects on duration than Zoom did, so the corresponding differences in peak timing are smaller and don't reach significance.

Table S22. Linear mixed effects model for f0 peak timing (in milliseconds)

	Estimate	SE	t-value	p
(Intercept)	33.68737	6.49173	5.189	0.01376
Program AudacityAlone	-0.92653	4.33582	-0.214	0.83081
Program Cleanfeed	-0.07265	4.32559	-0.017	0.98660
Program Messenger	6.52137	4.32899	1.506	0.13212
Program Skype	4.96764	4.32559	1.148	0.25093
Program Zoom	14.20237	4.32559	3.283	0.00104

Reference level Program = zoomH4n

Table S23 presents the summary of a linear mixed effects model for jitter in vowels, as predicted by the recording program. There was a random intercept for speaker.

There was no significant effect of jitter, though there was a marginal effect of the Zoom condition, finding more jitter than the H4n recorder.

Table S23. Linear mixed effects model for jitter in vowels

	Estimate	SE	t-value	p
(Intercept)	1.869E-02	3.319E-03	5.630	0.0233
Program AudacityAlone	7.49E-04	1.198E-03	0.625	0.5320
Program Cleanfeed	1.1E-03	1.195E-03	0.920	0.3575
Program Messenger	7.978E-04	1.196E-03	0.667	0.5049
Program Skype	3.855E-04	1.196E-03	0.322	0.7473
Program Zoom	2.261E-03	1.195E-03	1.891	0.0587

Reference level Program = zoomH4n

Table S24 presents the summary of a linear mixed effects model for spectral tilt (H1-H2) in vowels, as predicted by the recording program. There was a random intercept for speaker.

All of the programs exhibited effects of spectral tilt. Most of them underestimated spectral tilt, while MessengerThroughAudacity overestimated it. The effects suggest that transmission for many of these programs is worse for lower frequencies. Notably, this effect is even present in the AudacityAlone condition. On the other hand, the higher spectral tilt in the MessengerThrough Audacity condition might suggest that Messenger is amplifying low frequencies.

Table S24. Linear mixed effects model for spectral tilt in vowels

	Estimate	SE	t-value	p
(Intercept)	-1.6438	1.5670	-1.049	0.396287
Program AudacityAlone	-1.4486	0.5042	-2.873	0.004110
Program Cleanfeed	-1.3150	0.5026	-2.616	0.008960
Program Messenger	4.5964	0.5026	9.145	< 2e-16
Program Skype	-1.6829	0.5026	-3.348	0.000829
Program Zoom	-1.9654	0.5026	-3.910	9.53E-05

Reference level Program = zoomH4n

Table S25 presents the summary of a linear mixed effects model for the Harmonics-to-Noise Ratio (HNR) in vowels, as predicted by the recording program. There was a random intercept for speaker.

MessengerThroughAudacity exhibited a much higher HNR than the baseline condition. None of the other effects were significant, but they all have the trend towards being somewhat lower than the baseline, indicating more noise. The higher value for the MessengerThroughAudacity condition must have a different explanation. It isn't the result of excluding unmeasurable items; none of the conditions excluded more than 3 tokens. The result might come from amplification of low frequencies, like the spectral tilt effect; low frequencies include the clearest harmonics, so if these frequencies are amplified, the HNR would appear to be higher.

Table S25. Linear mixed effects model for HNR in vowels

	Estimate	SE	t-value	p
(Intercept)	7.2775	1.0350	7.032	0.0164
Program AudacityAlone	-0.3402	0.2915	-1.167	0.2434
Program	-0.2428	0.2906	-0.836	0.4035

Cleanfeed				
Program Messenger	1.2241	0.2906	4.213	2.64E-05
Program Skype	-0.3030	0.2906	-1.043	0.2972
Program Zoom	-0.3992	0.2910	-1.372	0.1703

Reference level Program = zoomH4n

Table S26 presents the summary of a linear mixed effects model for F1, as predicted by the recording program. There was a random intercept for speaker.

F1 was significantly lower in the MessengerThroughAudacity condition. The cause of the effect is somewhat unclear. This is addressed in more detail at the end of section 1.2.2, where formant effects are separated by vowel.

Table S26. Linear mixed effects model for F1 in vowels

	Estimate	SE	t-value	p
(Intercept)	639.5869	21.7862	29.357	0.000119
Program AudacityAlone	0.8942	13.7503	0.065	0.948153
Program Cleanfeed	2.6690	13.7503	0.194	0.846114
Program Messenger	-30.9754	13.7503	-2.253	0.024390
Program Skype	-0.3665	13.7503	-0.027	0.978739
Program Zoom	-7.4189	13.7503	-0.540	0.589577

Reference level Program = zoomH4n

Table S27 presents the summary of a linear mixed effects model for F2, as predicted by the recording program. There was a random intercept for speaker.

F2 was overestimated in all of the conditions, though the effect was smallest in the Cleanfeed condition. Section 1.2.2 addresses formant effects in more detail, separated by vowel.

Table S27. Linear mixed effects model for F2 in vowels

	Estimate	SE	t-value	p
(Intercept)	1937.355	83.931	23.083	0.00105
Program AudacityAlone	37.563	30.170	1.245	0.21327

Program Cleanfeed	37.638	30.170	1.248	0.21236
Program Messenger	65.234	30.170	2.162	0.03073
Program Skype	48.223	30.170	1.598	0.11012
Program Zoom	51.135	30.170	1.695	0.09026

Reference level Program = zoomH4n

Table S28 presents the summary of a linear mixed effects model for center of gravity (COG) in fricatives, as predicted by the recording program. There was a random intercept for speaker.

COG was significantly lower in the MessengerThroughAudacity condition, and higher in the Zoom condition. As in the Device comparisons, the largest effects are on /s/ and /z/, consistent with this being about the interpretation of noise when some of the main frication noise is cut off due to the sampling rate. Further analysis of differences between fricatives are presented in section 2.2.2.

Table S28. Linear mixed effects model for COG for fricatives

	Estimate	SE	t-value	p
(Intercept)	2652.604	201.695	13.152	3.2E-07
Program AudacityAlone	234.445	228.455	1.026	0.30509
Program Cleanfeed	-80.609	228.045	-0.353	0.72382
Program Messenger	-618.922	228.045	-2.714	0.00678
Program Skype	-50.513	228.045	-0.222	0.82475
Program Zoom	447.841	228.045	1.964	0.04988

Reference level Program = zoomH4n

2.2.2 Impact on contrasts

As for the comparisons by device, effects in these characteristics are primarily a concern if they alter our ability to find contrasts. In this section, we test whether contrasts depending on these characteristics are altered by the recording device.

Stress in vowels

Figure S13 illustrates vowel duration as influenced by stress. The program did not have any substantial impact on these measurements, even though the overall vowel duration measurements were influenced by device. The effect of stress is significant or marginally significant in all conditions, and of a similar size.

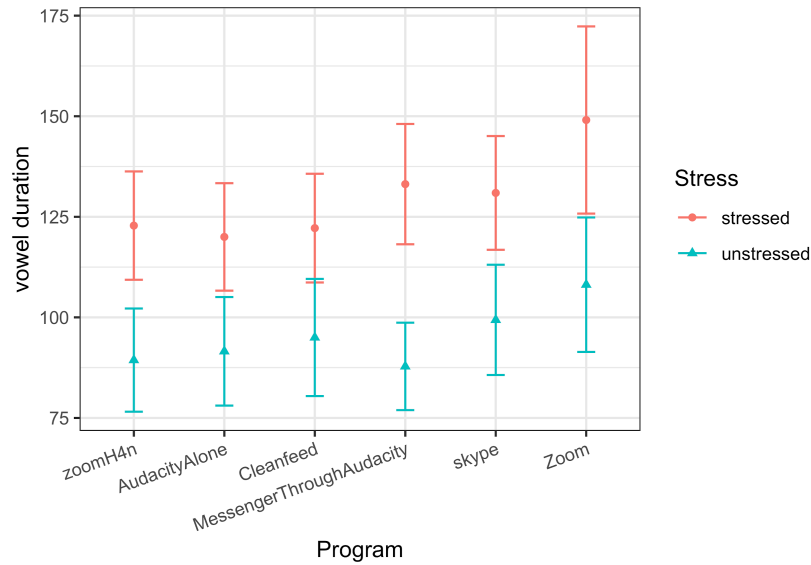


Figure S13. Measured vowel duration as predicted by program and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S14 illustrates F0 in vowels as influenced by stress. The program did not have any substantial impact on these measurements; there was a clear separation between stressed and unstressed vowels in all conditions, though there is some variation in the size of the effect.

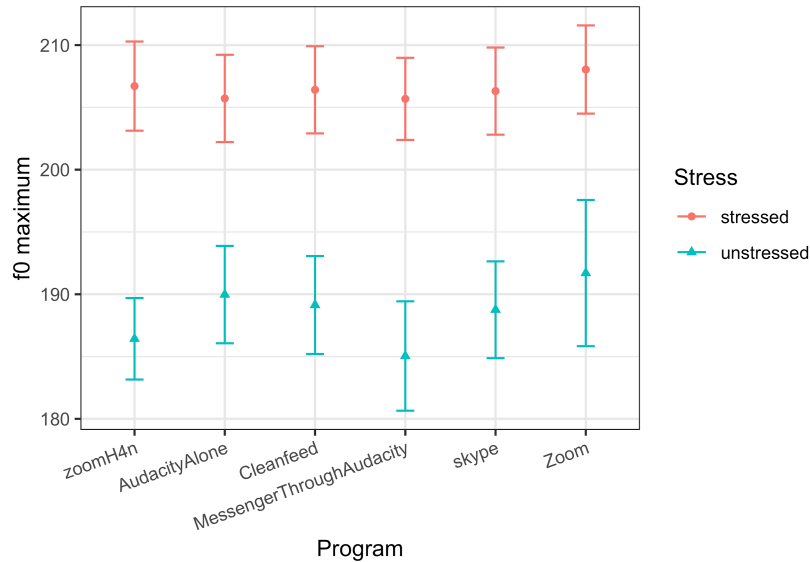


Figure S14. Measured f_0 maximum as predicted by program and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Table S29 presents the summary of a linear mixed effects model for intensity in vowels, as predicted by the recording program and stress. There was a random intercept for speaker.

The effect of stress on intensity is almost entirely eliminated in the MessengerThroughAudacity condition, which also has a very large overall effect on intensity. Figure S15 illustrates intensity in vowels as influenced by stress.

Table S29. Linear mixed effects model for intensity in vowels, including stress as a factor

	Estimate	SE	t-value	p
(Intercept)	78.3957	0.7219	108.601	< 2e-16
Program AudacityAlone	0.9572	1.0209	0.938	0.34906
Program Cleanfeed	-3.0543	1.0209	-2.992	0.00296
Program Messenger	-28.6849	1.0209	-28.098	< 2e-16
Program Skype	-2.7085	1.0209	-2.653	0.00832
Program Zoom	-5.6518	1.0209	-5.536	5.85E-08
Stress Unstressed	-2.2565	1.0209	-2.210	0.02769
Program AudacityAlone:Stress Unstressed	-0.6752	1.4437	-0.468	0.64029

Program Cleanfeed:Stress Unstressed	-0.1677	1.4437	-0.116	0.90762
Program Messenger:Stress Unstressed	2.0610	1.4437	1.428	0.15427
Program Skype:Stress Unstressed	-0.3784	1.4437	-0.262	0.79340
Program Zoom:Stress Unstressed	0.2081	1.4437	0.144	0.88546

Reference level Program = zoomH4n

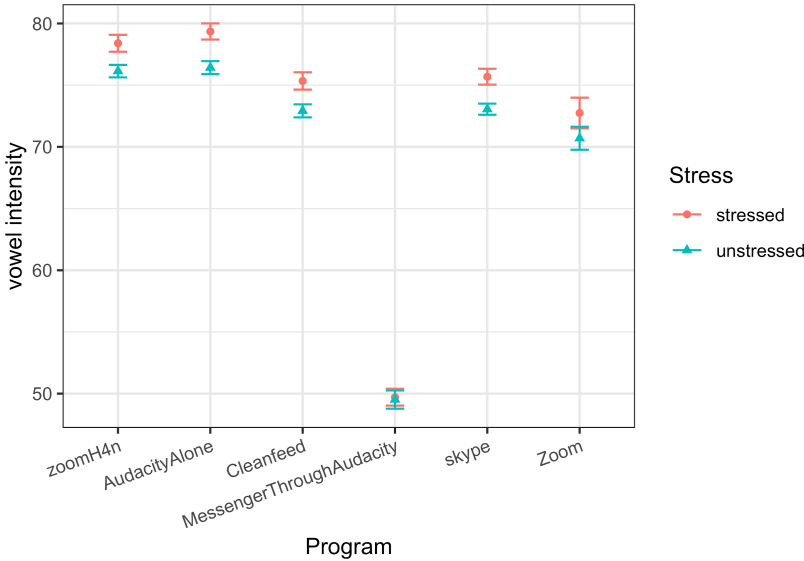


Figure S15. Measured vowel intensity as predicted by program and stress. Pooled raw data, not the model results. Whiskers indicate the standard error.

Coda voicing

Figure S16 illustrates vowel duration as influenced by coda voicing. The program did not have any substantial impact on these measurements, though there was variation in the size of the effect, and some conditions were substantially overestimating overall vowel duration.

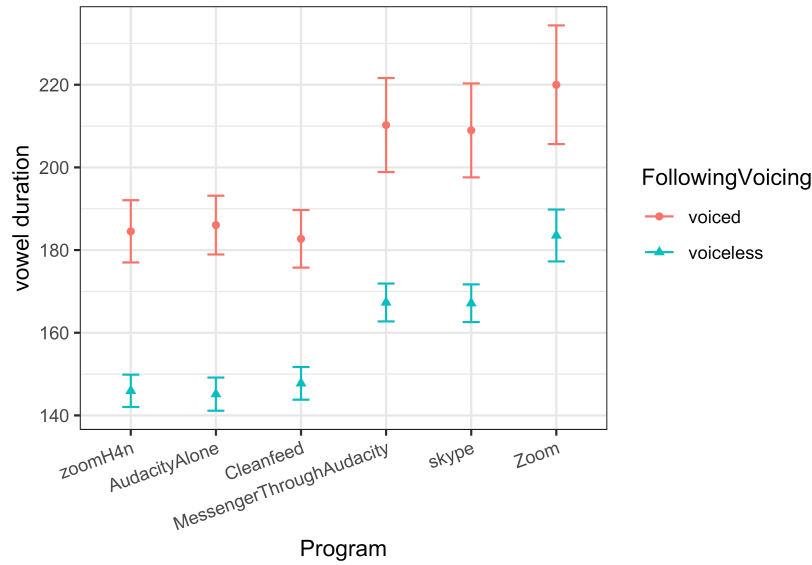


Figure S16. Measured vowel duration as predicted by program and coda voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S17 illustrates HNR in vowels as influenced by coda voicing. The program did not have any substantial impact on these measurements; the effect was a similar size in all conditions.

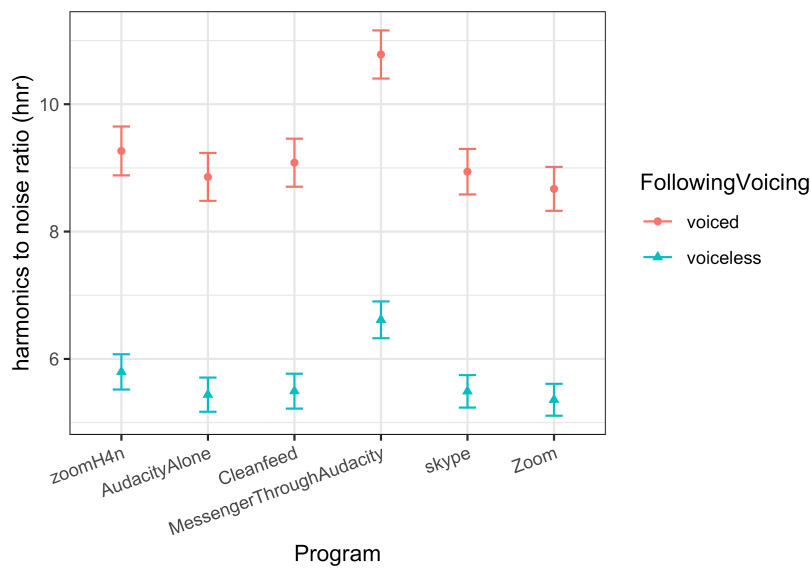


Figure S17. Measured HNR as predicted by program and coda voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Onset voicing

Figure S18 illustrates HNR in vowels as influenced by onset voicing. The program did not have any substantial impact on these measurements; the effect was a similar size in all conditions, even though MessengerThroughAudacity substantially overestimated HNR for vowels in both environments.

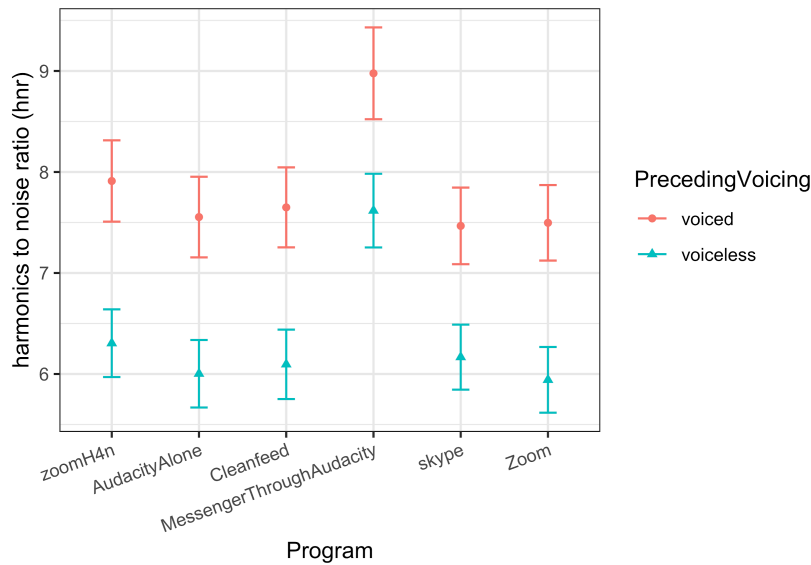


Figure S18. Measured HNR as predicted by program and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S19 illustrates spectral tilt in vowels as influenced by onset voicing. The program did not have any substantial impact on these measurements; the effect was a similar size in all conditions, even though MessengerThroughAudacity substantially overestimated spectral tilt for vowels in both environments.

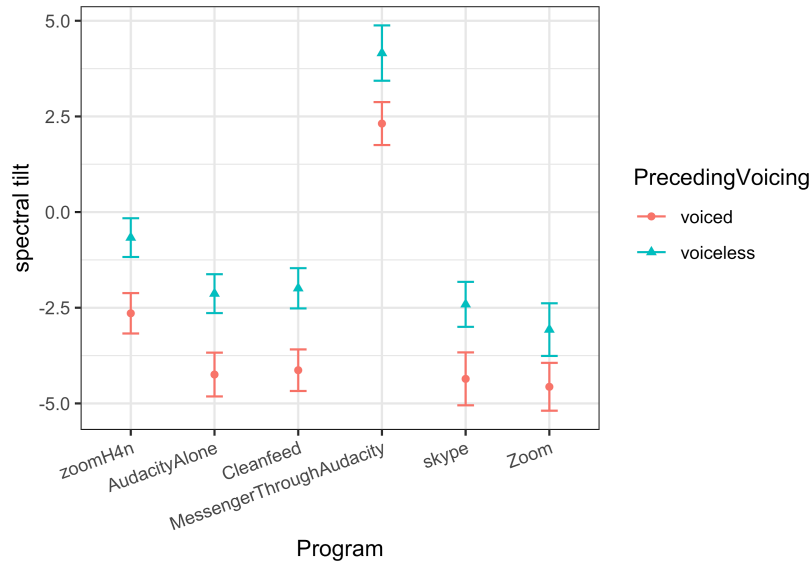


Figure S19. Measured spectral tilt as predicted by program and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Figure S20 illustrates maximum F0 as influenced by onset voicing. The program did not have any substantial impact on these measurements; the effect was a similar size in all conditions.

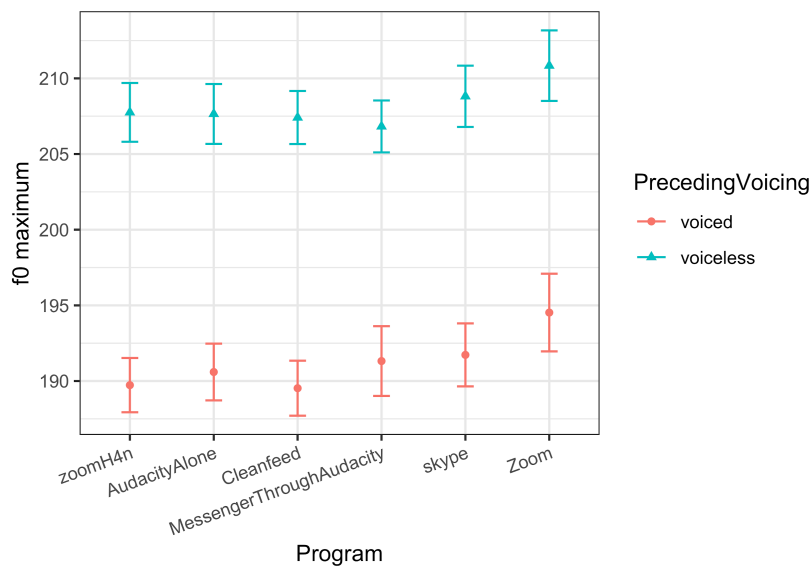


Figure S20. Measured f0 maximum as predicted by program and onset voicing. Pooled raw data, not the model results. Whiskers indicate the standard error.

Consonant manner

Table S30 presents the summary of a linear mixed effects model for COG in /s/ and /ʃ/, as predicted by the recording program and segment. There was a random intercept for speaker.

MessengerThroughAudacity was substantially underestimating /s/, to the point where it has a slightly lower cog than /ʃ/, and they don't substantially differ. Figure S21 illustrates COG across all fricatives. Zoom, Skype, and MessengerThrough Audacity were also substantially overestimating the COG for /f/. Because the frication for /f/ is rather diffuse, this could be the result of amplifying lower frequencies, or filtering out higher frequency aperiodic noise as “background noise.”

Table S30. Linear mixed effects model for COG in sibilant fricatives, including particular fricative as a factor

	Estimate	SE	t-value	p
(Intercept)	4735.873	224.220	21.122	9.72E-06
Program AudacityAlone	194.358	197.660	0.983	0.3260
Program Cleanfeed	-301.293	197.660	-1.524	0.1282
Program Messenger	-1676.704	197.660	-8.483	3.84E-16
Program Skype	-380.368	197.660	-1.924	0.0550
Program Zoom	509.264	197.660	2.576	0.0103
Segment /ʃ/	-1544.664	279.542	-5.526	5.78E-08
Program AudacityAlone:Segment /ʃ/	73.227	395.320	0.185	0.8531
Program Cleanfeed:Segment /ʃ/	465.019	395.320	1.176	0.2401
Program Messenger:Segment /ʃ/	1744.020	395.320	4.412	1.31E-05
Program Skype:Segment /ʃ/	510.392	395.320	1.291	0.1974
Program Zoom:Segment	-206.294	395.320	-0.522	0.6021

/s/				
-----	--	--	--	--

Reference level Program = zoomH4n, Segment = /s/

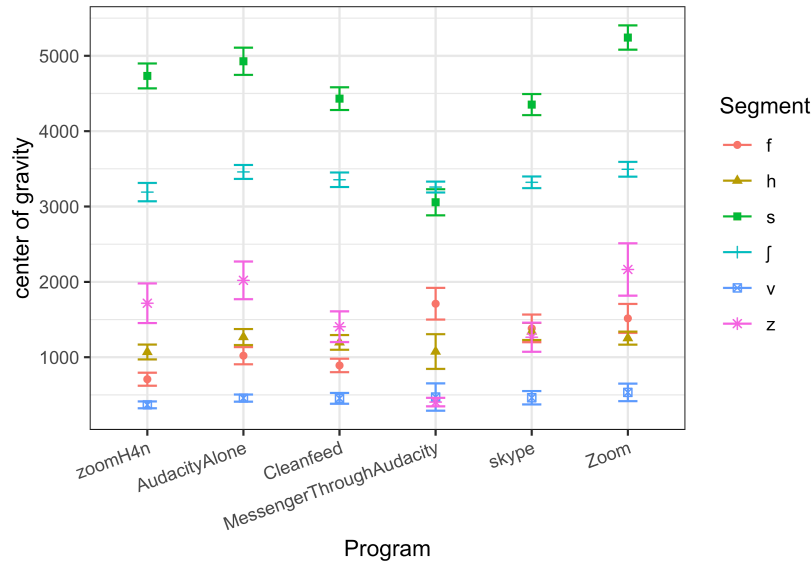


Figure S21. Measured center of gravity as predicted by program and segment, among fricatives. Pooled raw data, not the model results. Whiskers indicate the standard error.

Vowel quality

Figure S22 illustrates F1 and F2 as influenced by vowel quality and device. Adding the interaction between vowel quality and device significantly improves the model for F1 ($\chi^2 = 166.9$, $df = 55$, $p < 0.0001$). The interaction between vowel quality and device also significantly improves the model for F2 ($\chi^2 = 85.9$, $df = 55$, $p = 0.0049$). There is substantial variation in the measurement of both formants in recordings made by different programs. These effects vary by vowel, which is why they did not show up as clearly in the overall models for F1 and F2 above.

Many of the conditions produce measurements that substantially shift a vowel far into the region of a different vowel, which is likely to cause major problems in phonetic analysis and even in phonological categorization of tokens. While clusters for measurements of each vowel are mostly apparent, Messenger Through Audacity is a clear outlier for most of the vowels.

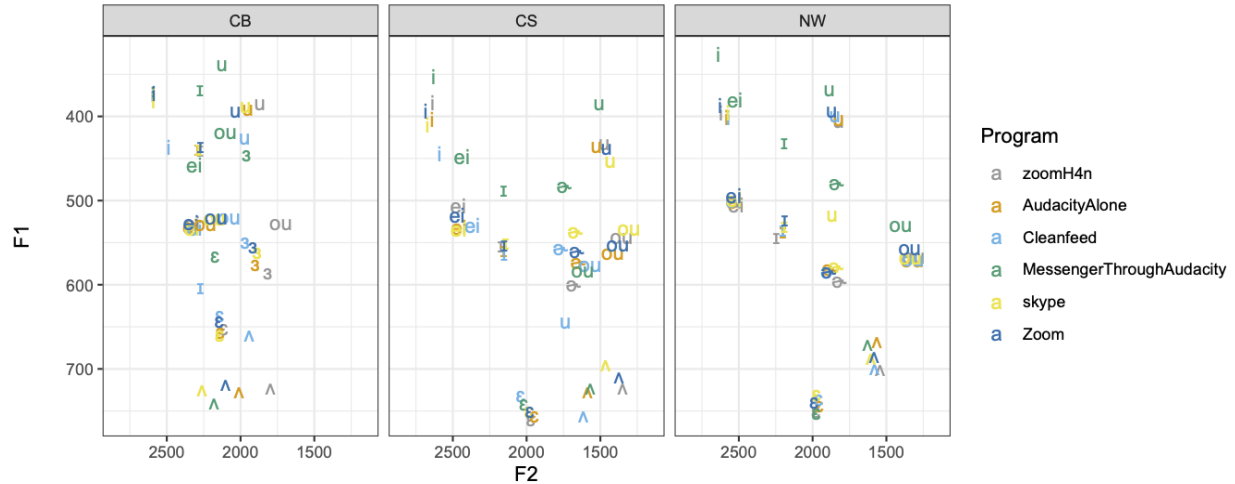


Figure S22. Vowel spaces for each speaker as measured in Phase 2 (by-Program).

Figure S23 illustrates F1 and F2 as influenced by vowel quality and program, pooled across all speakers; some of the shifts were similar for all speakers.

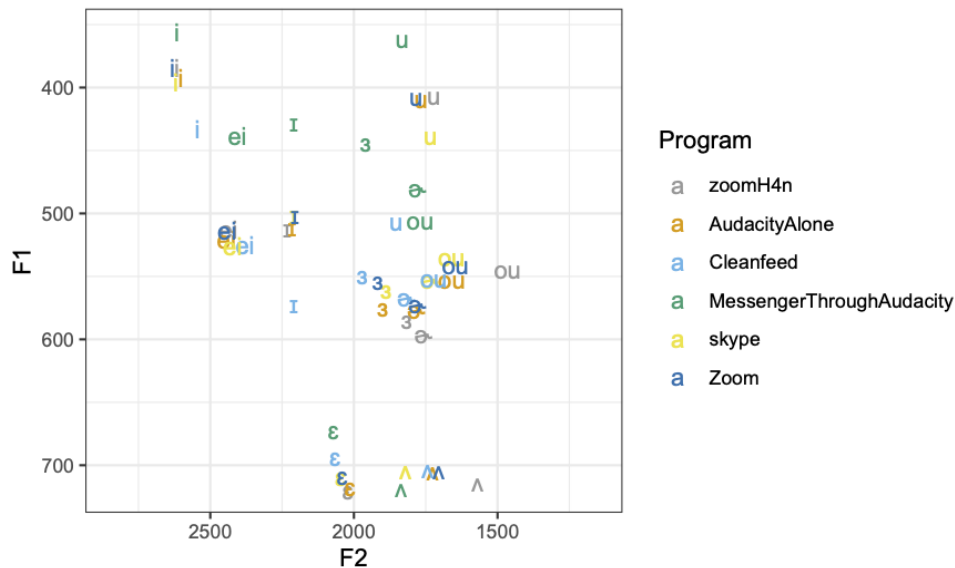


Figure S23: Vowel spaces pooled across speakers in Phase 2 (comparisons by Program).

2.3 Comparing Zoom Conditions

This section provides the models comparing measurements across the Zoom conditions -- this varied based on whether the recording was local or remote, whether the computer was mac or windows, whether the files were converted from mp4 or not, and whether the recording used the “Original Audio” setting in Zoom or not.

In most of these measures, there were clearly no effects; the variation between conditions is very small. For duration, two comparisons were marginally significant, but would not withstand correction for multiple comparisons.

Table S31 presents the summary of a linear mixed effects model for consonant duration as predicted by the recording condition. There was a random intercept for speaker.

There were no significant consonant duration differences between the different conditions. The largest difference, between Mac Local mp4 and Mac Remote wav, is only marginally significant.

Table S31. Linear mixed effects model for consonant duration

	Estimate	SE	t-value	p
(Intercept)	95.5668	9.3867	10.181	0.00635
Condition Mac Local mp4	-0.7256	3.3926	-0.214	0.83066
Condition Mac Remote mp4	2.3659	3.3926	0.697	0.48560
Condition Mac Remote wav	5.4259	3.3926	1.599	0.10982
Condition Windows Remote wav	4.4479	3.3926	1.311	0.18990
Condition Mac Remote mp4 OriginalAudio	1.4826	3.3926	0.437	0.66211
Condition Mac Remote wav OriginalAudio	1.3832	3.3926	0.408	0.68349

Reference level Condition = Local, macOSX, not "original audio", not from mp4

Table S32 presents the summary of a linear mixed effects model for vowel duration as predicted by the recording condition. There was a random intercept for speaker.

Some of the vowel duration differences were significant, though the effects were small. Note that, as seen in the main model for effects of program, all of the Zoom conditions overestimated vowel duration, so the shortest values, in the two two Mac Remote nonOriginalAudio conditions were the closest to the gold standard.

Table S32. Linear mixed effects model for vowel duration

	Estimate	SE	t-value	p
(Intercept)	188.5685	11.8240	15.948	0.000823
Condition Mac Local mp4	-3.1889	7.0258	-0.454	0.649959
Condition Mac Remote mp4	-13.9319	7.0258	-1.983	0.047492
Condition Mac Remote wav	-13.4056	7.0258	-1.908	0.056511
Condition Windows Remote wav	-11.1765	7.0258	-1.591	0.111799

Condition Mac Remote mp4 OriginalAudio	0.2786	7.0258	0.040	0.968368
Condition Mac Remote wav OriginalAudio	-0.6811	7.0258	-0.097	0.922779

Reference level Condition = Local, macOSX, not "original audio", not from mp4

Table S33 presents the summary of a linear mixed effects model for consonant intensity as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on consonant intensity.

Table S33. Linear mixed effects model for consonant intensity

	Estimate	SE	t-value	p
(Intercept)	6.049E+01	1.022E+00	59.182	6.97E-05
Condition Mac Local mp4	2.796E-01	4.703E-01	0.595	0.552
Condition Mac Remote mp4	6.637E-01	4.703E-01	1.411	0.158
Condition Mac Remote wav	5.013E-01	4.703E-01	1.066	0.287
Condition Windows Remote wav	4.066E-01	4.703E-01	0.865	0.387
Condition Mac Remote mp4 OriginalAudio	9.794E-02	4.703E-01	0.208	0.835
Condition Mac Remote wav OriginalAudio	2.112E-01	4.705E-01	0.449	0.654

Reference level Condition = Local, macOSX, not "original audio", not from mp4

Table S34 presents the summary of a linear mixed effects model for vowel intensity as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on vowel intensity.

Table S34. Linear mixed effects model for vowel intensity

	Estimate	SE	t-value	p
(Intercept)	7.105E+01	9.802E-01	72.489	7.37E-05
Condition Mac Local mp4	1.752E-01	3.679E-01	0.476	0.634
Condition Mac Remote mp4	4.7E-01	3.679E-01	1.278	0.201
Condition Mac Remote wav	3.248E-01	3.679E-01	0.883	0.377
Condition Windows Remote wav	4.407E-01	3.679E-01	1.198	0.231
Condition Mac Remote mp4	2.881E-02	3.679E-01	0.078	0.938

OriginalAudio				
Condition Mac Remote wav OriginalAudio	4.4E-02	3.679E-01	0.120	0.905

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S35 presents the summary of a linear mixed effects model for mean f0 in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on f0 mean.

Table S36. Linear mixed effects model for mean f0 in vowels

	Estimate	SE	t-value	p
(Intercept)	181.6879	3.7772	48.102	0.000134
Condition Mac Local mp4	-0.3498	1.6447	-0.213	0.831612
Condition Mac Remote mp4	-0.4635	1.6447	-0.282	0.778104
Condition Mac Remote wav	-0.1902	1.6460	-0.116	0.908009
Condition Windows Remote wav	-0.5141	1.6447	-0.313	0.754613
Condition Mac Remote mp4 OriginalAudio	0.1005	1.6473	0.061	0.951379
Condition Mac Remote wav OriginalAudio	0.6872	1.6486	0.417	0.676830

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S37 presents the summary of a linear mixed effects model for peak timing -- the position of the maximum f0 relative to the beginning of the vowel, as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on peak timing

Table S37. Linear mixed effects model for f0 peak timing in vowels

	Estimate	SE	t-value	p
(Intercept)	4.783E-02	7.198E-03	6.645	0.00562
Condition Mac Local mp4	2.237E-04	5.036E-03	0.044	0.96458
Condition Mac Remote mp4	-7.292E-03	5.036E-03	-1.448	0.14777
Condition Mac Remote wav	-7.126E-03	5.04E-03	-1.414	0.15755
Condition Windows Remote wav	-4.719E-03	5.036E-03	-0.937	0.34888
Condition Mac Remote mp4 OriginalAudio	9.987E-05	5.044E-03	0.020	0.98420

Condition Mac Remote wav OriginalAudio	1.182E-03	5.048E-03	0.234	0.81482
---	-----------	-----------	-------	---------

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S38 presents the summary of a linear mixed effects model for jitter in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on jitter.

Table S38. Linear mixed effects model for jitter in vowels

	Estimate	SE	t-value	p
(Intercept)	2.095E-02	3.48E-03	6.021	0.0198
Condition Mac Local mp4	-4.834E-05	1.282E-03	-0.038	0.9699
Condition Mac Remote mp4	4.426E-05	1.283E-03	0.034	0.9725
Condition Mac Remote wav	6.03E-04	1.283E-03	0.470	0.6385
Condition Windows Remote wav	-8.33E-04	1.283E-03	-0.649	0.5164
Condition Mac Remote mp4 OriginalAudio	-1.889E-04	1.284E-03	-0.147	0.8831
Condition Mac Remote wav OriginalAudio	3.224E-04	1.285E-03	0.251	0.8020

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S39 presents the summary of a linear mixed effects model for spectral tilt (H1-H2) in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on spectral tilt.

Table S39. Linear mixed effects model for spectral tilt in vowels

	Estimate	SE	t-value	p
(Intercept)	-3.61901	1.87583	-1.929	0.184
Condition Mac Local mp4	0.15951	0.54428	0.293	0.769
Condition Mac Remote mp4	-0.09068	0.54428	-0.167	0.868
Condition Mac Remote wav	-0.01968	0.54428	-0.036	0.971
Condition Windows Remote wav	-0.25595	0.54428	-0.470	0.638
Condition Mac Remote mp4 OriginalAudio	-0.30535	0.54428	-0.561	0.575
Condition Mac Remote wav OriginalAudio	-0.03448	0.54428	-0.063	0.949

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S40 presents the summary of a linear mixed effects model for Harmonics-to-Noise Ratio (HNR) in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on HNR.

Table S40. Linear mixed effects model for HNR in vowels

	Estimate	SE	t-value	p
(Intercept)	6.88E+00	9.62E-01	7.152	0.0155
Condition Mac Local mp4	-4.623E-03	2.793E-01	-0.017	0.9868
Condition Mac Remote mp4	1.575E-01	2.793E-01	0.564	0.5728
Condition Mac Remote wav	1.855E-01	2.797E-01	0.663	0.5073
Condition Windows Remote wav	3.098E-01	2.793E-01	1.109	0.2674
Condition Mac Remote mp4 OriginalAudio	1.713E-03	2.797E-01	0.006	0.9951
Condition Mac Remote wav OriginalAudio	7.772E-04	2.797E-01	0.003	0.9978

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S41 presents the summary of a linear mixed effects model for F1 in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on F1.

Table S41. Linear mixed effects model for F1 in vowels

	Estimate	SE	t-value	p
(Intercept)	632.1407	20.6590	30.599	0.000109
Condition Mac Local mp4	-1.7226	12.7756	-0.135	0.892753
Condition Mac Remote mp4	-0.4777	12.7756	-0.037	0.970176
Condition Mac Remote wav	0.7096	12.7756	0.056	0.955711
Condition Windows Remote wav	-0.5826	12.7756	-0.046	0.963632
Condition Mac Remote mp4 OriginalAudio	-1.2682	12.7756	-0.099	0.920933
Condition Mac Remote wav OriginalAudio	5.4891	12.7756	0.430	0.667490

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S42 presents the summary of a linear mixed effects model for F2 in vowels as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on F2.

Table S42. Linear mixed effects model for F2 in vowels

	Estimate	SE	t-value	p
(Intercept)	1988.306	87.521	22.718	0.00113
Condition Mac Local mp4	-11.572	30.086	-0.385	0.70054
Condition Mac Remote mp4	-19.920	30.086	-0.662	0.50798
Condition Mac Remote wav	-18.964	30.086	-0.630	0.52855
Condition Windows Remote wav	-13.574	30.086	-0.451	0.65190
Condition Mac Remote mp4 OriginalAudio	-6.369	30.086	-0.212	0.83237
Condition Mac Remote wav OriginalAudio	7.407	30.086	0.246	0.80555

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

Table S43 presents the summary of a linear mixed effects model for Center of Gravity (COG) in fricatives as predicted by the recording condition. There was a random intercept for speaker.

There was no effect of recording condition on COG.

Table S43. Linear mixed effects model for COG in fricatives

	Estimate	SE	t-value	p
(Intercept)	3100.437	226.059	13.715	9.13E-08
Condition Mac Local mp4	32.669	256.421	0.127	0.899
Condition Mac Remote mp4	-5.229	256.421	-0.020	0.984
Condition Mac Remote wav	-52.408	256.421	-0.204	0.838
Condition Windows Remote wav	7.509	256.421	0.029	0.977
Condition Mac Remote mp4 OriginalAudio	18.048	256.421	0.070	0.944
Condition Mac Remote wav OriginalAudio	-6.542	256.421	-0.026	0.980

Reference level Condition = Local, macOSX, not “original audio”, not from mp4

2.4 Signal to noise ratio

Figure S24 plots the average signal to noise ratio across each condition. It was calculated by measuring the mean energy in the “signal” (that is, from the words used in the analysis) compared to the background noise, as measured in intervals labeled as silence, using the following formula.

$$(1) \quad SNR = 20\log(P_{signal}/P_{noise})$$

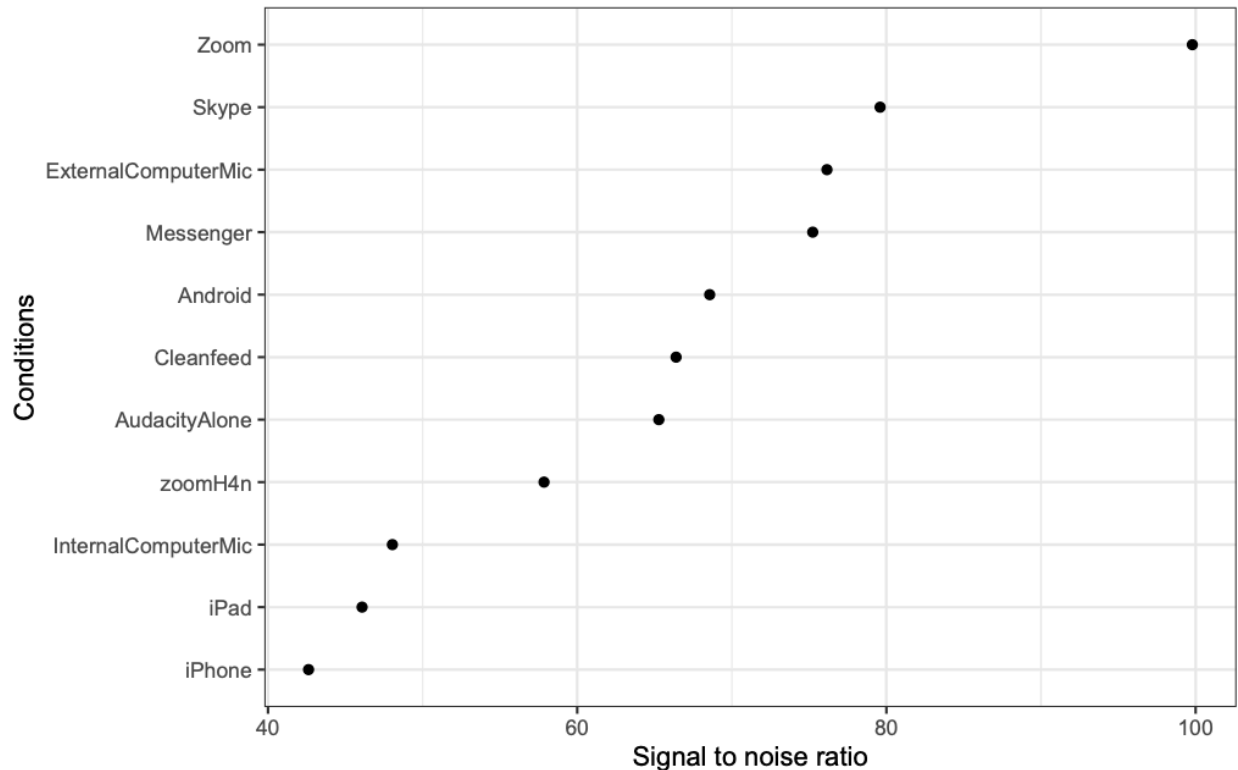


Figure S24. Signal to noise ratio by condition, across all devices and programs

Signal to noise ratio should be above 50 dB for adequate recordings. Here the highest signal to noise ratios come from the zoom recordings, presumably as an effect of the zoom software suppressing background noise. Our gold standard recording did not have a particularly high signal to noise ratio, compared to some of the other recording devices used in the live recording condition. This is probably due in part to the sensitivity of the H4n’s microphone and picking up background noise from the air conditioning system and external traffic noise.³ Some of the software programs include filters to amplify what is identified as speech or suppress sounds that are identified as background noise; while this may improve perceptual clarity, it is altering the

³ As mentioned in the main article, we attempted to mimic a reasonable field situation in that we recorded in a “quiet” room but did not attempt to remove all background noise. While the building was quiet, there was both noise from the building’s air conditioning system and traffic noise from the street outside.

acoustic signal and could potentially influence the results in misleading ways, so having a higher SNR is not necessarily indicative of a better recording.

Table S44 presents the summary of a linear mixed effects model for SNR as predicted by device. SNR was calculated for each sentence, using the maximum amplitude of the target word and of the silence following the sentence. As in previous models, there was a random intercept for speaker.

Table S44. Linear mixed effects model for SNR

	Estimate	SE	t-value	p
(Intercept)	56.954	4.449	12.80	0.0447
Device Android	10.191	1.012	10.07	<2e-16
Device ExternalComputerMic	19.223	1.012	18.99	<2e-16
Device InternalComputerMic	-11.522	1.012	-11.38	<2e-16
Device iPad	-13.679	1.012	-13.51	<2e-16
Device iPhone	-15.505	1.012	-15.32	<2e-16

Reference level Program = zoomH4n

Table S45 presents the summary of a linear mixed effects model for SNR as predicted by program. SNR was calculated for each sentence, using the maximum amplitude of the target word and of the silence following the sentence. As in previous models, there was a random intercept for speaker.

Table S45. Linear mixed effects model for SNR

	Estimate	SE	t-value	p
(Intercept)	57.861	1.833	31.560	2.97E-05
Program AudacityAlone	7.426	1.351	5.496	4.48E-08
Program Cleanfeed	8.541	1.351	6.321	3.31E-10
Program Messenger	17.380	1.351	12.863	< 2e-16
Program Skype	21.740	1.351	16.089	< 2e-16
Program Zoom	41.935	1.351	31.035	< 2e-16

Reference level Program = zoomH4n

As can be seen from Figure S25 below, which presents the mean intensity for words recorded by each device, the Hn4 had the highest mean intensity measurements out of all the device

conditions, implying that the issue is not with low microphone levels (compared to, for example, the external microphone). Reduction of noise when there is no speech does not necessarily mean that Zoom was equally effective at reducing background noise during speech, or that it removed noise in a way that will leave crucial acoustic characteristics of the speech signal intact.

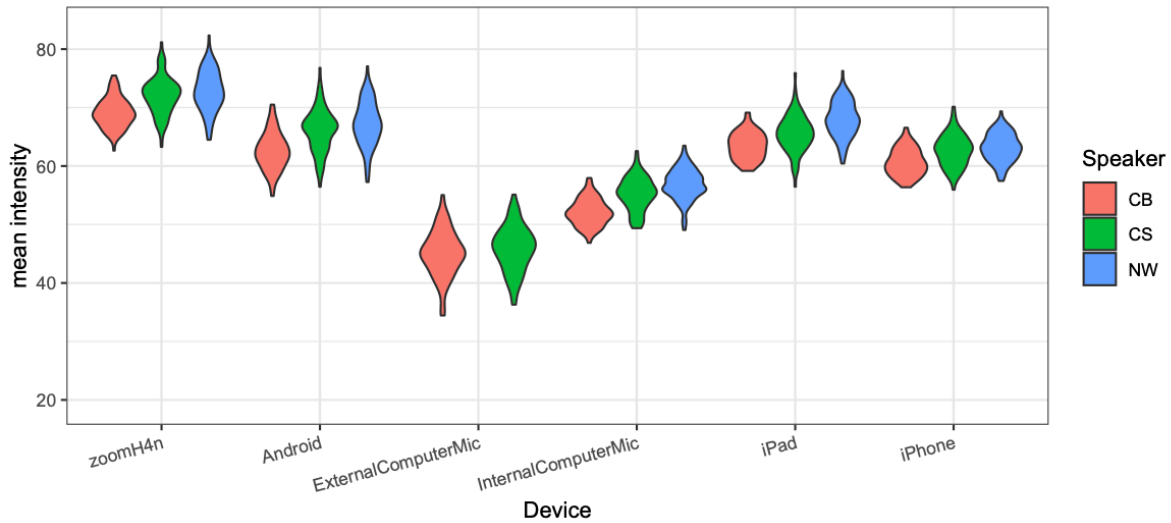


Figure S25. Mean intensity by device and speaker

Figure S26 presents the mean intensity measurements for all words in each version of the recording, based on the software program and the speaker. While input to all conditions was the same (the H4n playing the recordings that were made through its internal microphones), the mean intensity differs, implying either that Cleanfeed does a signal boost, or that other programs are autolimiting the microphone input.

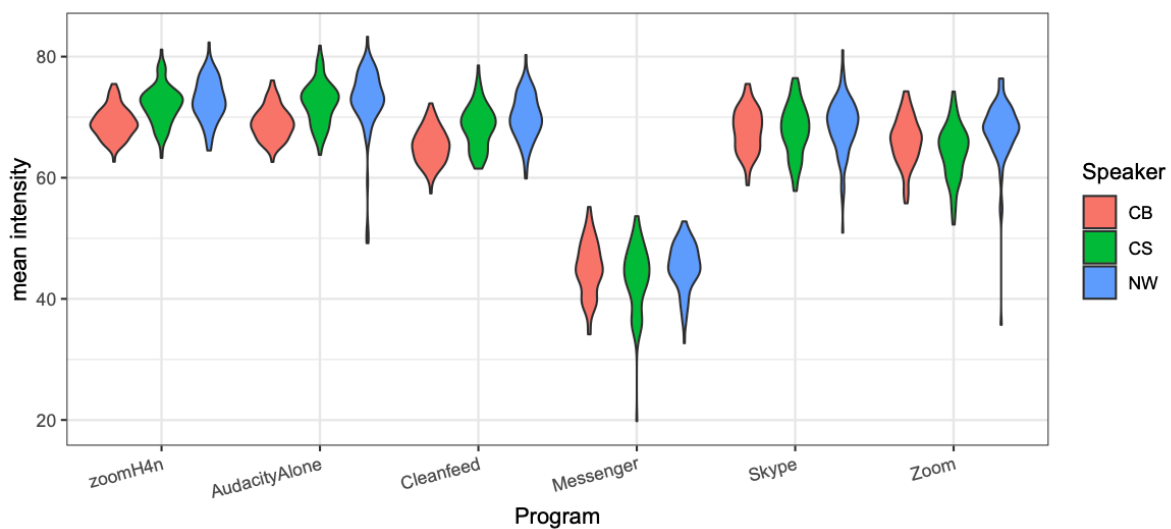


Figure S26. Mean intensity by program and speaker

Further indication that programs are playing a role in limiting mic input comes from the mean amplitude according to the program condition, where it can be seen that the amplitude measurements for the four main conditions vary extensively:

Differences in the amplitude of the signal and the background noise could directly impact some acoustic measures, including intensity, center of gravity, and the harmonics-to-noise ratio, which are each discussed above. Differences in amplitude are also likely to be part of the explanation for differences in identification of segment boundaries.

2.5 Timing issues

To account for whether duration differences and other measurement differences were due to how the forced aligner was placing boundaries or if they were the result of actual duration differences caused by the condition, we combined these recordings with the textgrids produced for the baseline conditions. Because the recordings were made under identical conditions (either because they were made at the same time or recorded from the H4n recorder's output), the intervals should be identical; if they indeed are the same, the textgrids should align across all recording conditions.

However, the textgrids from the baseline condition do not align with the other conditions. Because of the substantial timing differences, it was impossible to use the textgrids from the baseline condition to make measurements in the other recording conditions; the interval for a segment was often partially or entirely shifted onto another segment. This lack of alignment makes clear that the compression/decompression systems of these programs created some differences in timing. While the changes for any individual word are somewhat small (about 10 ms at most), these small mis-alignments can combine to produce substantial misalignment between recordings, when the recordings are long. (Note that for analytical purposes all files were aligned individually, so these offsets are not driving the differences between results.)

The following figures plot the difference between the interval timestamps for the gold standard versus three of the recording conditions (Messenger, Cleanfeed, and Zoom), to illustrate the extent of the timing issues that were present within the data. Because the order in which the stimuli were presented was randomized between speakers, measurements are done separately for individual speakers. As can be seen from Figures S27 and S28, the Zoom condition (in black) is very close to the boundaries in recordings from the "gold standard" H4n recorder. The Messenger and Cleanfeed conditions, however, can be off by several hundred milliseconds.

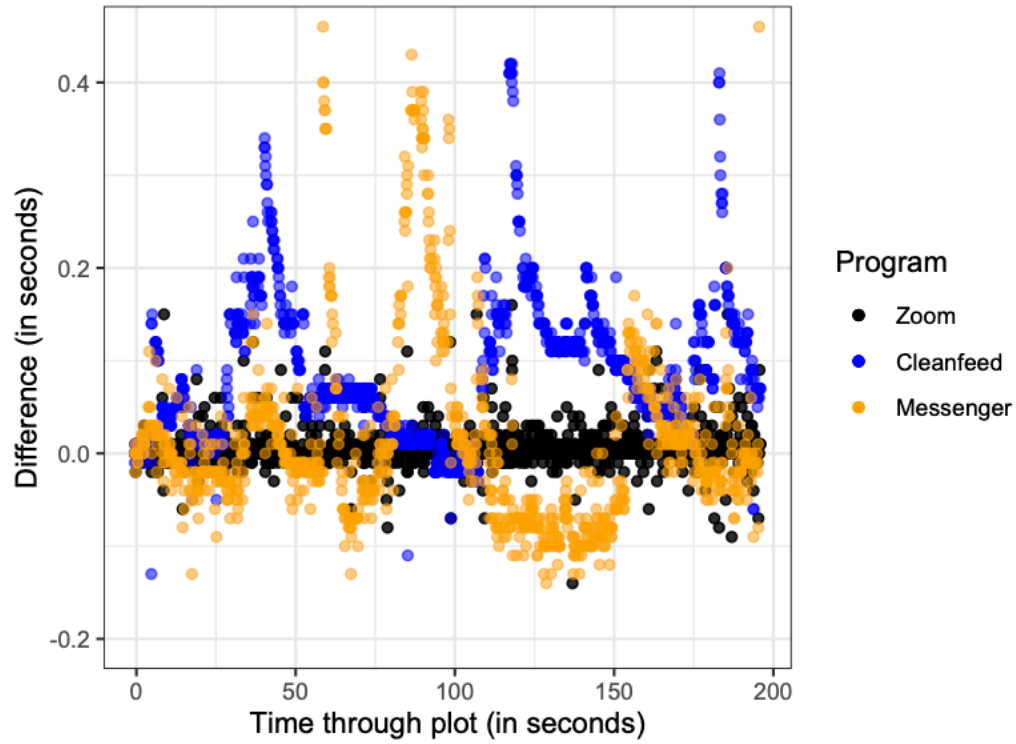


Figure S27. Difference in alignment between the H4n and three Program conditions (Messenger, Cleanfeed, and Zoom) for Speaker 1 (CS)

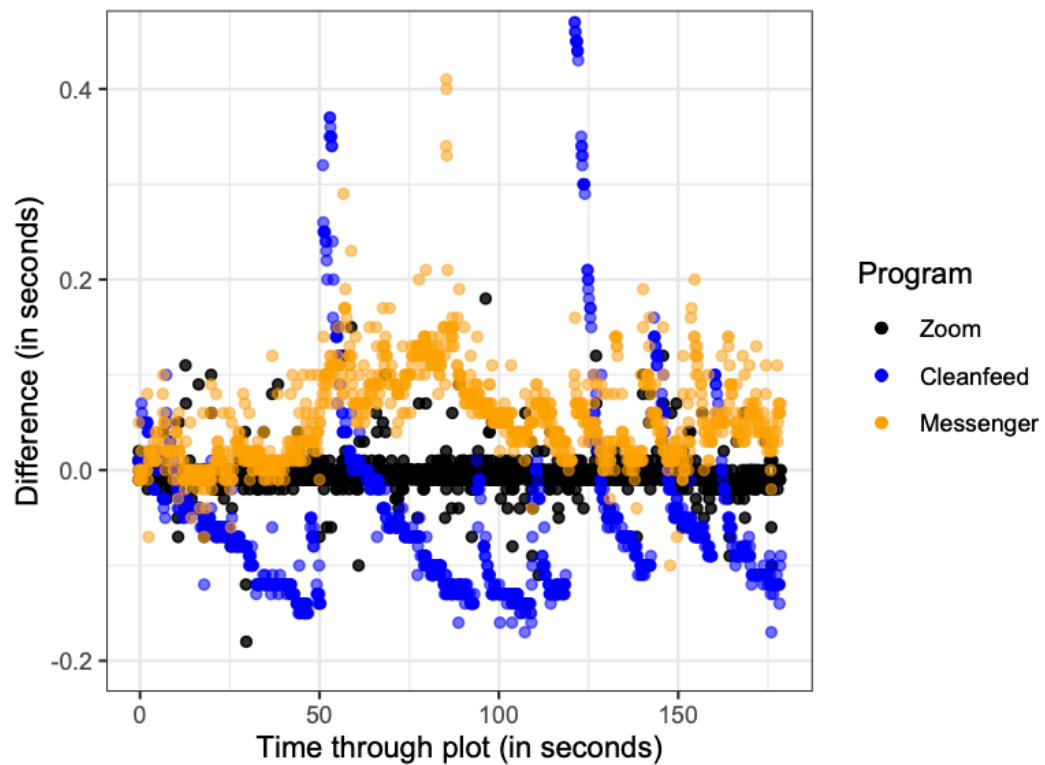


Figure S28. Difference in alignment between the H4n and three Program conditions (Messenger, Cleanfeed, and Zoom) for Speaker 2 (CB)

3 Additional comments on software

Here we offer some additional impressionistic summary comments about the software options and their relative reliability and ease of use, for researchers who are intending to make online recordings.

Cleanfeed was very user-friendly and performed well overall. It is probably the least well known of the set of software options tested here (but is used in podcasting interviews). It was straightforward to set up. The software allows the user to choose which speakers to record and how to record them (separate tracks, together, etc). Individual participants can be muted. Muting individual participants was not particularly important for our tests but using this would allow a way to have multiple remote participants while avoiding possible interference. However, it has a big drawback that video is not present, which limits its effectiveness.

Skype and **Zoom** are well known to participants; they are easy to set up and use. However, they exhibit extensive digital artefacts, so it is important to be careful when using these programs. Information about the conditions of recording (including any settings) should be included with recording metadata.

Facebook Messenger performed poorly in our tests, frequently giving outputs that differ from all the other conditions. Because Audacity alone behaves like the gold standard for almost all tests, the effects of Messenger recorded through Audacity, the effects cannot be attributed to Audacity itself. However, the effects might be due to how Messenger compresses the audio or in how Audacity interacts with audio input from Messenger. Messenger is widely available, but provides little control over recordings and produces unreliable results.

4 List of stimuli

bad	cheap	fade	leave	rib	ten	insult (n.)
badge	chest	fan	mace	rich	tick	insult (v.)
base	chew	file	match	ridge	tongue	permit (n.)
bat	chip	fuss	maze	rim	tug	permit (v.)

batch	choke	fuzz	mob	rip	van	survey (n.)
batch	chug	gap	mop	roam	vase	survey (v.)
bead	clock	half	neck	robe	vote	suspect (n.)
bean	clog	have	paid	sap	wash	suspect (v.)
bet	deck	jest	pet	sheep	watch	torment (n.)
bid	den	joke	pick	ship	wish	torment (v.)
bit	dip	jug	pig	shoe	witch	
boat	do	lash	pile	sick	zap	
cab	edge	latch	plod	sue	zip	
cap	etch	leaf	plot	tap	zoo	

The order of items was randomized for each speaker. Words occurred within the frame sentence “We say ____ again.”

Additional References

Chen, Wei-Rong, Douglas H. Whalen, & Christine Shadle. 2019. F0-induced formant measurement errors result in biased variabilities. *Journal of the Acoustical Society of America*, 145(5), EL360-366.

Kong, Eun Jong, Mary E. Beckman & Jan Edwards. 2012. Voice onset time is necessary but not always sufficient to describe acquisition of voiced stops: The cases of Greek and Japanese. *Journal of Phonetics*, 40, 725-744.